

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3DDA20-2XX-XX

2: Dual Row

No. of contacts Per Row(02~50)

G0: Gold Flash

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

S0: Selective Au

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

TE: Tin 200u"

X

N: Non Type

N: W/O Peg

X: Box

X

RoHS

X

EX: 036XXX028


A: 3.6

L1: As Required



B: 2.8



AMTEK 耀德
2023.10.05
Released DCC

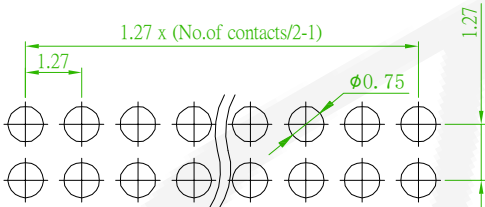

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

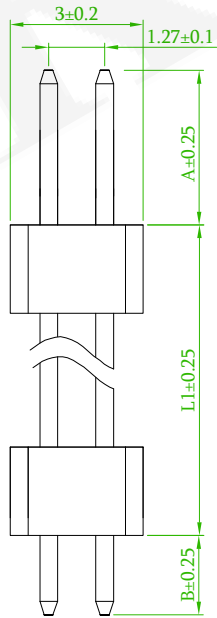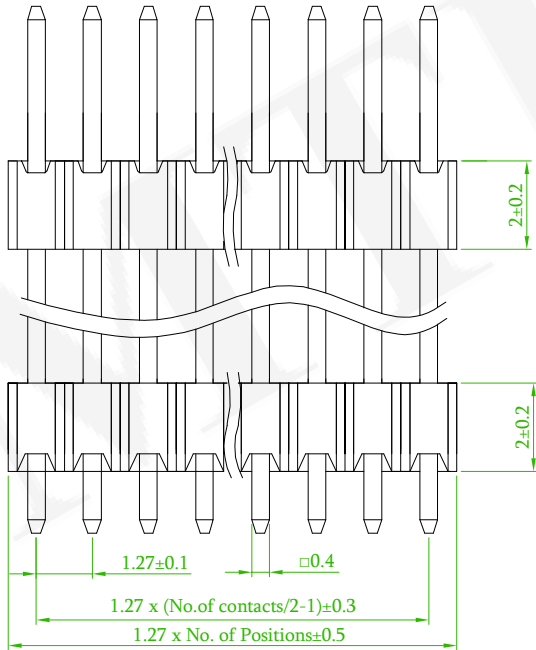

Old Part No. : PH3D20-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
Ex1	ECN No.:210619 Cancel the top view	Benson	2021/07/10
Dx1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DDA20-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA270	版本 REV.	F	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		