

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 3 D D A 2 5 - 2 X X X X X X X U - A L 1 B - 0 0


1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"	N:Non Type	N:W/O Peg	X:Box C:Tube With Cap	RoHS	EX:030XXX028 A:3.0 L1:As Required B:2.8
--------------	-----------------------------------	---	--	------------	-----------	--------------------------	------	--



AMTEK 糧德

2023.10.05

Released DCC

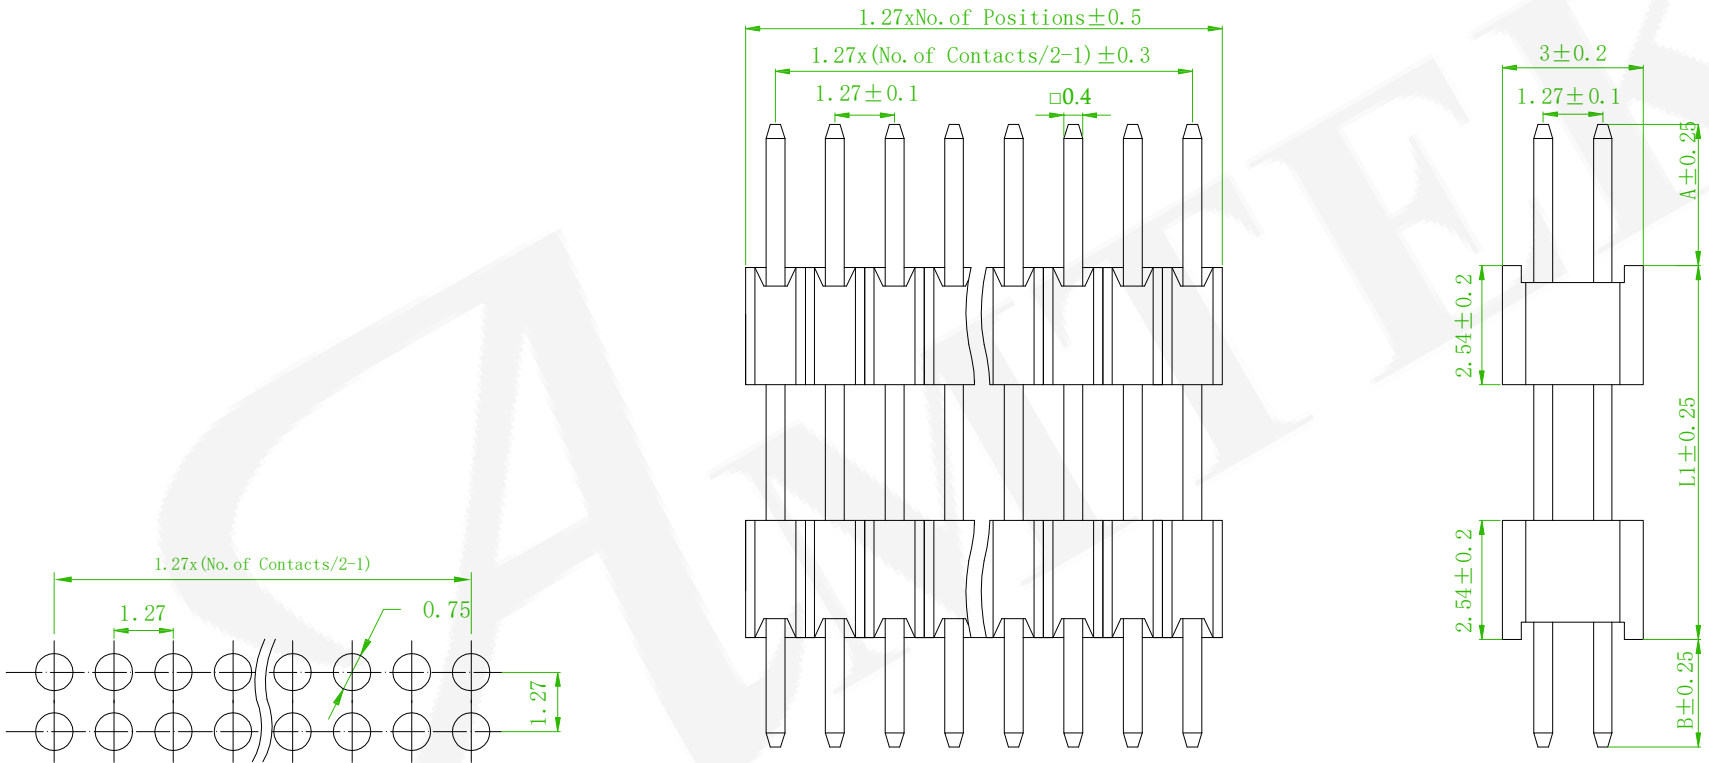

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3D25-2XX-U

ECN NO.:230707 Revise the drawing	Alice	2023/08/04
ECN No.:210619 Cancel the top view	Alice	2021/09/16
ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/18
REV.	ECN NO. OR DESCRIPTION	REVISED DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DDA25- 2XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2016/06/22
圖號 DRAWING NO.	GN110-GA303	版本 REV.	E	核對 CHECKED	Mavis 2016/06/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/22	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		