

MATERIAL

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5PH3DMA08-2XX XX XX XX XX XX U - A L1 B - 0 0

2:DUAL ROW	NO. OF CONTACTS PER ROW(02-50)	G0:GOLD FLASH GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0:TIN PLATED	S0:SELECTIVE Au SA:SELECTIVE Au 5u" SB:SELECTIVE Au 10u" SC:SELECTIVE Au 20u" SD:SELECTIVE Au 30u" TE:TIN 200u"	P:WITH PEG N:W/O PEG	R:T/R WITH CAP H:T/R W/O CAP C:TUBE WITH CAP T:TUBE W/O CAP	RoHS	EX:064XXX055 A:6.4 L1:As Required B:5.5
------------	--------------------------------	---	--	-------------------------	--	------	--

AMTEK 懌德



2025.03.28

Released DCC


NOTE 1

Package For Tape & Reel With CAP:




5PH3DMA08-2XXXXXXU-XXX XXX XXX-00



DIM.A
DIM.L1
R:T/R With Cap
H:T/R W/O Cap
DIM.A add DIM.L1
must be less than 23mm.

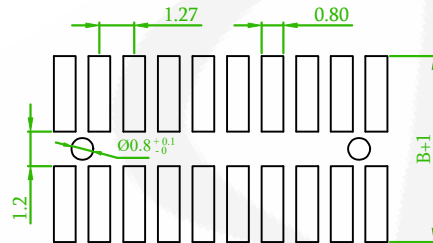

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

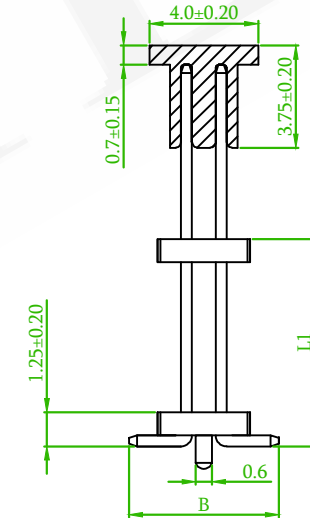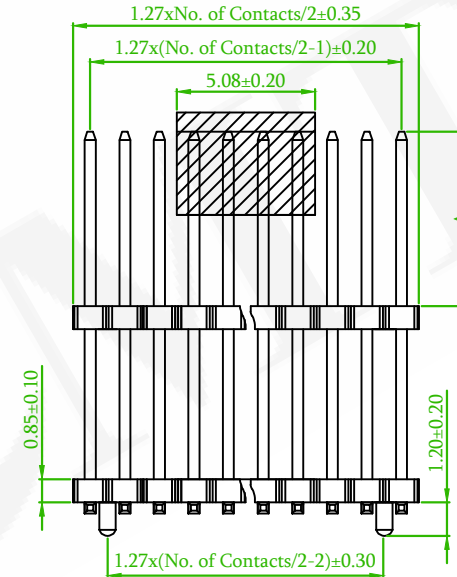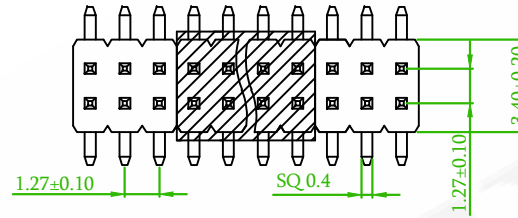

△	ECN 202503036	Willy	2025/03/28
△x2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
△	ECN No.:210619 Cancel the top view	Alice	2021/09/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DMA08-2XXXXXXU-00				繪圖 DRAWN	Volvo 2007/07/31
圖號 DRAWING NO.	GN003-GA008	版本 REV.	G	核對 CHECKED	Paul 2007/07/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/07/31	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	第三 ANGLE PROJECTION		