

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 3 D M A 1 0 - 1 X X X X X X U - A L 1 B - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA:Au 5u"

GB:Au 10u"

GC:Au 20u"

GD:Au 30u"

T0:Tin Plated

S0:Selective Au

SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

A:A Type
(Odd & Even Pin)
B:B Type
(Only Even Pin)


N:W/O Peg

R:T/R With Cap
H:T/R W/O Cap
C:Tube With Cap
(5 Pin ↑)
T:Tube W/O Cap
(5 Pin ↑)


RoHS

EX:030XXX046
A:3.0
L1:As Required
B:4.6

CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

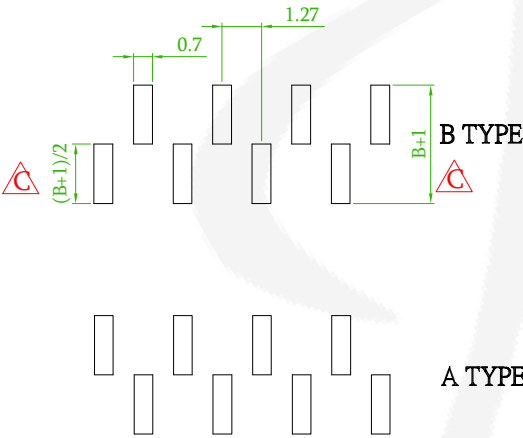


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

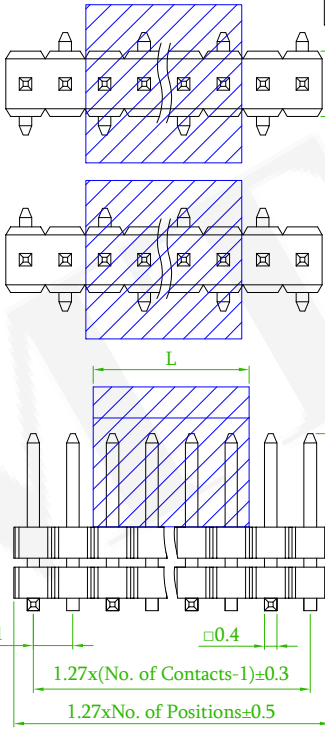

B TYPE

A TYPE

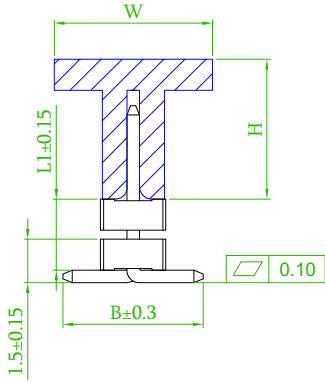

AMTEK 糧德
2023.10.05
Released DCC



Old Part No. : PH3DMA10-1XX-U

△x2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
△E	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△D	ECR NO.:170503. Add annotations.	Gary	2017/06/16
△C	Modify P.C.B Layout	Gary	2017/03/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DMA10-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/08
圖號 DRAWING NO.	G0000-GA440	版本 REV.	F	核對 CHECKED	Jonny 2016/09/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		