

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3DMA10-2XX-XX

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

TM: Matte Tin

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: W/O Peg

P: With Peg

R: T/R With Cap

H: T/R W/O Cap

C: Tube With Cap

T: Tube W/O Cap

X: Box

RoHS

EX: 030XXX046

A: 3.0

L1: As Required

B: 4.6

A1B

-00

AMTEK 緯德

2022.10.21

Released DCC




5PH3DMA10-2XX-XX

XN XU



A1B

-00

Pin No.	φD1	φD2
2 x 3 Pin	0.6	0.8
≥ 2 x 4 Pin	0.7	0.9

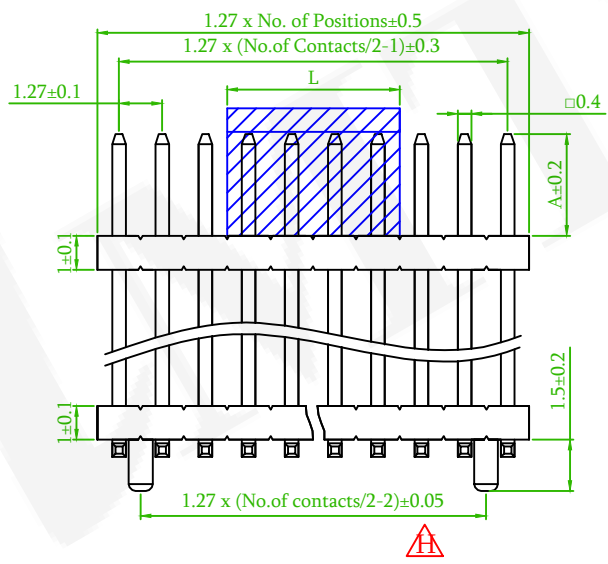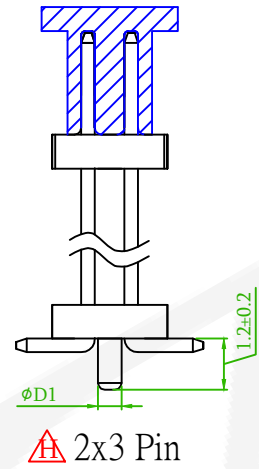

CAP	L	W	H (Ref.)
≥ 2 x 2 Pin	5.08	4.0	3.75

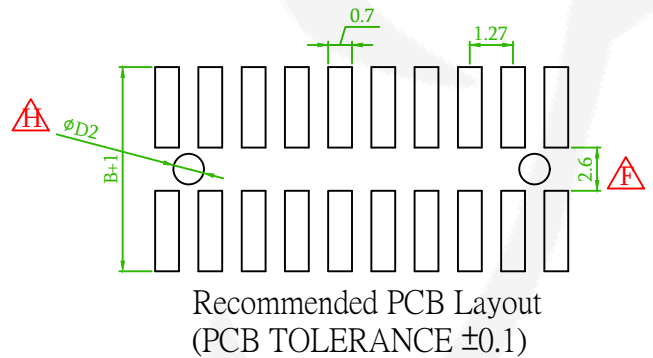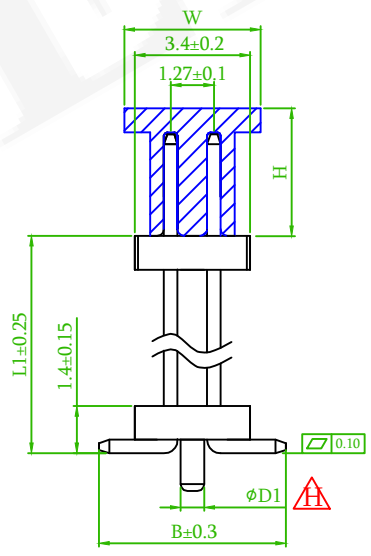

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH3DM10-2XX-U

△x1	Add the plated options	Alice	2022/10/21
△x1	Add the package options	Benson	2021/11/26
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

緯德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DMA10-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/06
圖號 DRAWING NO.	GN016-GA271	版本 REV.	L	核對 CHECKED	John 2015/08/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/06	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		