

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3DMA15-1XXXXU-A L1B-00

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

TD: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N:W/O Peg

A:A Type
(Odd & Even Pin)

B:B Type
(Only Even Pin)

U:RoHS+Hi-Temp.

EX:030XXX037

A:3.0

L1:As Required

B:3.7

R:T/R With Cap

H:T/R W/O Cap


C:Tube With Cap
(5 Pin ↑)

T:Tube W/O Cap
(5 Pin ↑)




AMTEK 耀德
2023.10.05
Released DCC


CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

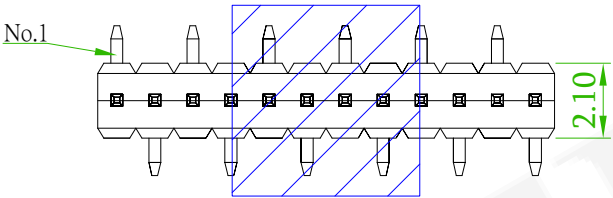



A TYPE

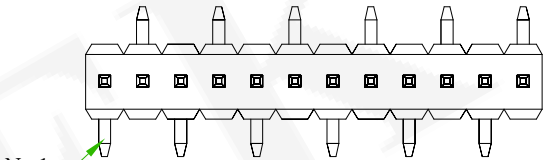

B TYPE

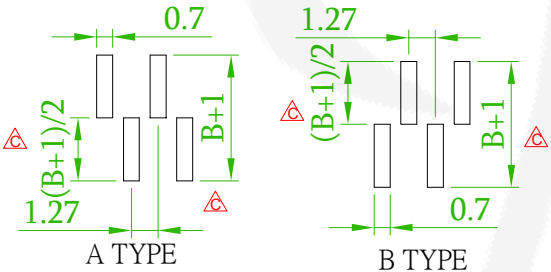

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

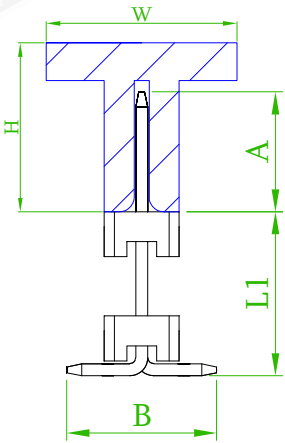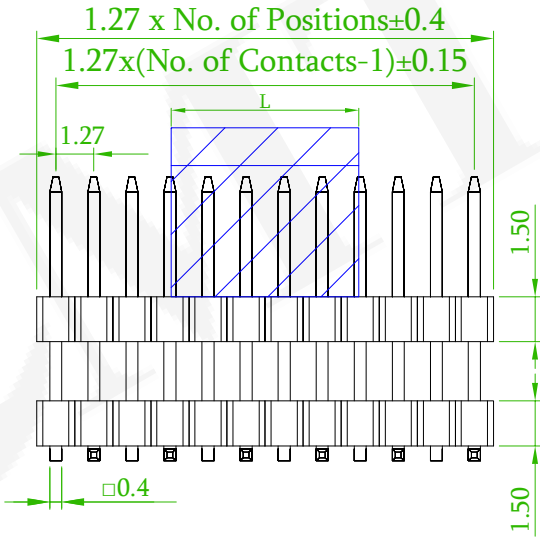

Old P/N : PH3DM15-1XX-U

△x2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
△x1	Modify Plastic Direction	Eric	2018/11/09
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△	ECR NO.:170503. Add annotations.	Gary	2017/06/16
△	Modify P.C.B Layout	Gary	2017/03/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DMA15-△ 1XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Mack 2007/07/10
圖號 DRAWING NO.	GN003-GA007	版本 REV.	G	核對 CHECKED	Josh 2018/11/09	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/09	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		