

MATERIAL

Insulator: Nylon 9T,UL94V-0, Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 3 D M A 1 5 - 2 X X X X X N X U - A/L1/B - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

TM: Matte Tin

P: With Peg
N: W/O Peg

RoHS

EX: 030XXX046

A: 3.0

L1: As Required

B: 4.6


R: T/R With Cap
H: T/R W/O Cap
C: Tube With Cap
T: Tube W/O Cap
X: Box




AMTEK 耀德

2023.09.11


Released DCC

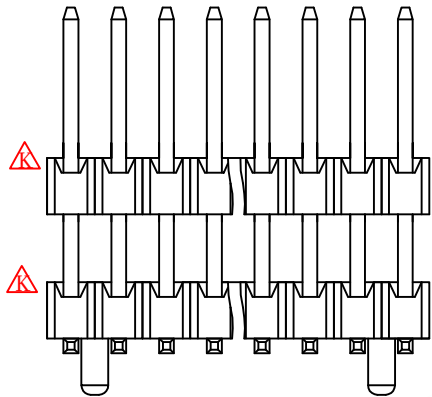

With Peg


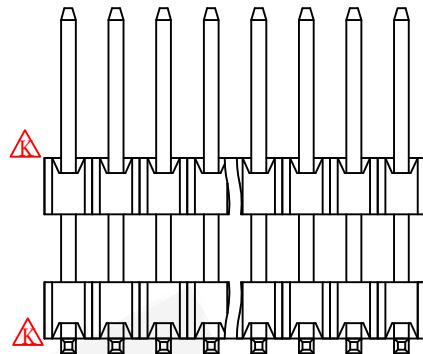


W/O Peg

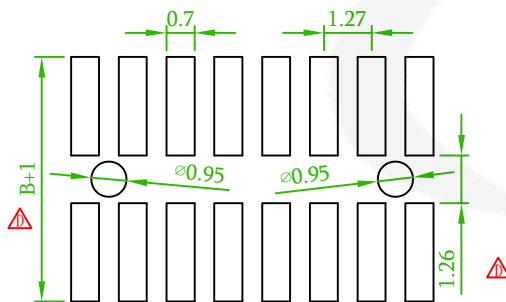

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

CAP	L	W	H (Ref.)
$\geq 2 \times 2$ Pin	5.08	4.0	3.75

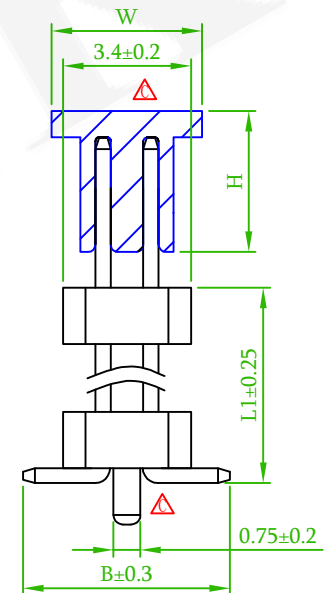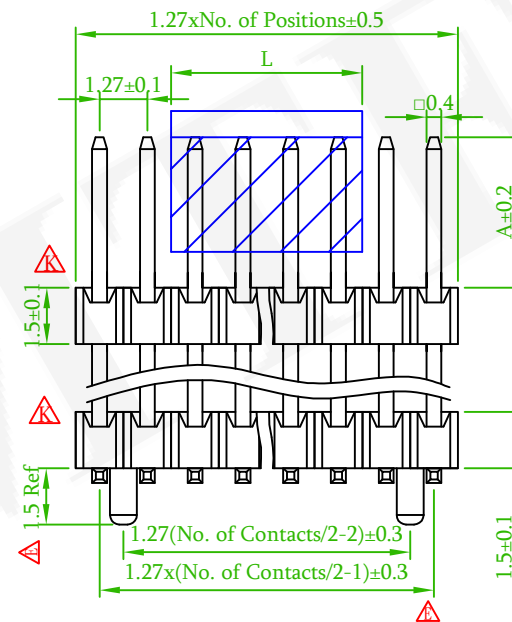

Old P/N: PH3DM15-2

	ECN NO.:230808 Revise the drawing	Benson	2023/08/24
	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
	ECN No.:210619 Cancel the top view	Alice	2021/09/17
	Add an option: X: Box.	Gary	2018/12/25
	Add an option: TM: Matte Tin.	Gary	2018/12/24
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DMA15- 2XXXXXXNXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/06
圖號 DRAWING NO.	GN016-GA272	版本 REV.	K	核對 CHECKED	Josh 2018/12/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/24	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		