

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass $\triangle$

ORDER INFORMATION

5 P H 3 D M A 1 7 - 2 X X X X X N X U - A L1 B - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: W/O Peg
P: With Peg

RoHS

R: T/R With Cap

H: T/R W/O Cap

C: Tube With Cap

T: Tube W/O Cap

EX: 030XXX046
A: 3.0
L1: As Required
B: 4.6


AMTEK 糧德

2023.10.05



Released DCC



CAP	L	W	H (Ref.)
$\geq 2 \times 2$ Pin	5.08	4.0	3.75

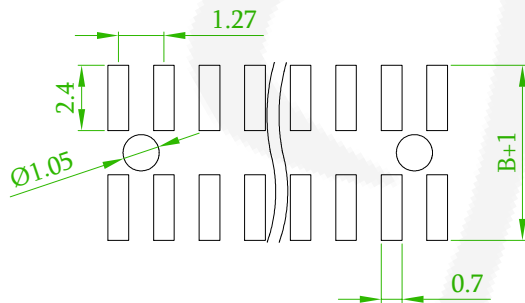

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

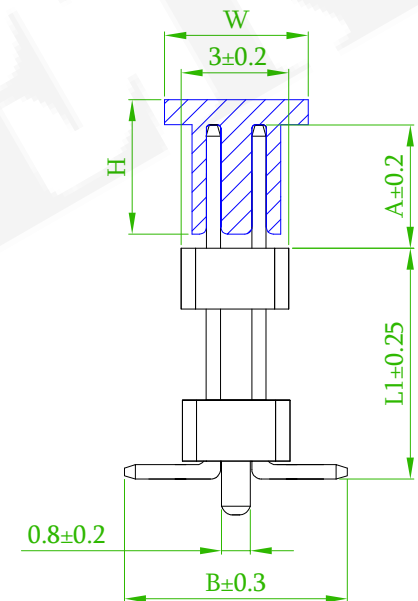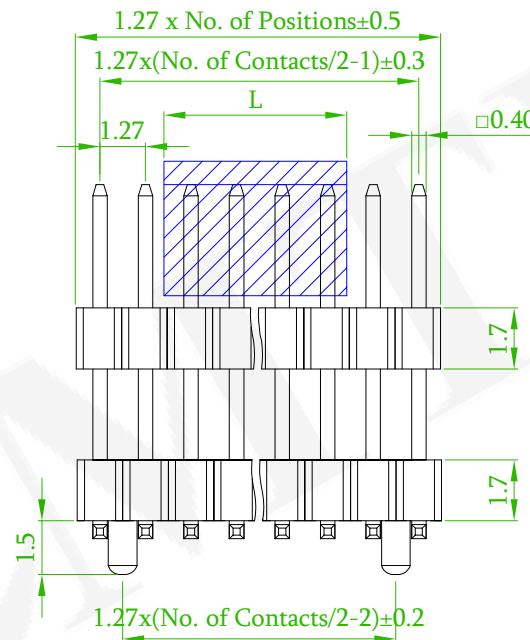

Old P/N : PH3DM17-2XX-U

$\triangle$ x2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
$\triangle$	ECN No.:210619 Cancel the top view	Alice	2021/09/17
$\triangle$	Add the option.	Roy	2018/11/30
$\triangle$	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DMA17-2XXXXXXXU -XXXXXXXXXX-00 $\triangle$				繪圖 DRAWN	Kent 2004/09/09
圖號 DRAWING NO.	GN016-GA009	版本 REV.	G	核對 CHECKED	Josh 2018/11/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/30	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		