

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 3 D M A 2 0 - 2 X X X X X X U - A L 1 B - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0: Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N: W/O Peg
P: With Peg


R: T/R With Cap
H: T/R W/O Cap
C: Tube With Cap
T: Tube W/O Cap

RoHS


EX:030XXX046
A:3.0
L1:As Required
B:4.6



AMTEK 耀德
2023.10.05
Released DCC




W/O Peg





With Peg

CAP	L	W	H (Ref.)
≧ 2 x 2 Pin	5.08	4.0	3.75

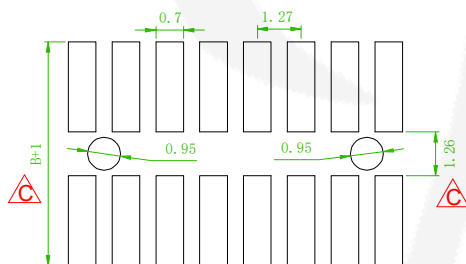

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

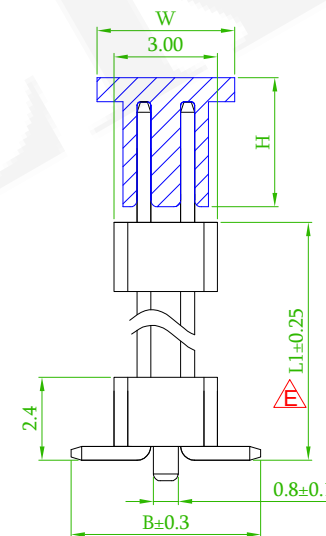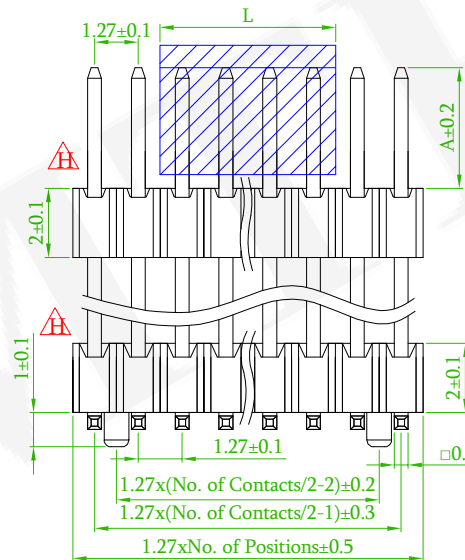

Old Part No.:PH3DM20-2XX-U

△	ECN NO.:230808 Revise the drawing	Benson	2023/08/10
△x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
△	ECN No.:210619 Cancel the top view	Alice	2021/09/17
△	Revise the dimension	Nick	2019/09/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DMA20-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/06/30
圖號 DRAWING NO.	GN016-GA273	版本 REV.	H	核對 CHECKED	Hank 2016/06/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/06/30	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		