

Contact Pin: Brass

5 P H 3 D M A 2 5 - 1 X X X X X X X U - A L1 B - 0 0

No. of contacts Per Row(02~40)	
-----------------------------------	--

G0:Gold Flash	S0:Selective Au
GA:Au 5u"	SA:Selective Au 5u"
GB:Au 10u"	SB:Selective Au 10u"
GC:Au 20u"	SC:Selective Au 20u"
GD:Au 30u"	SD:Selective Au 30u"
T0:Tin Plated	TE:Tin 200u"

N·W/O Peg

A:A Type (Odd & Even Pin)
B:B Type (Only Even Pin)

RoHS





EX:030XX037
A:3.0
L1:As Required
B:3.7

AMTEK 糧德

(2023.11.15)

Released DCC

CAP	L	W	H (Ref.)
$\geq 1 \times 2$ Pin	5.0	5.08	4.5

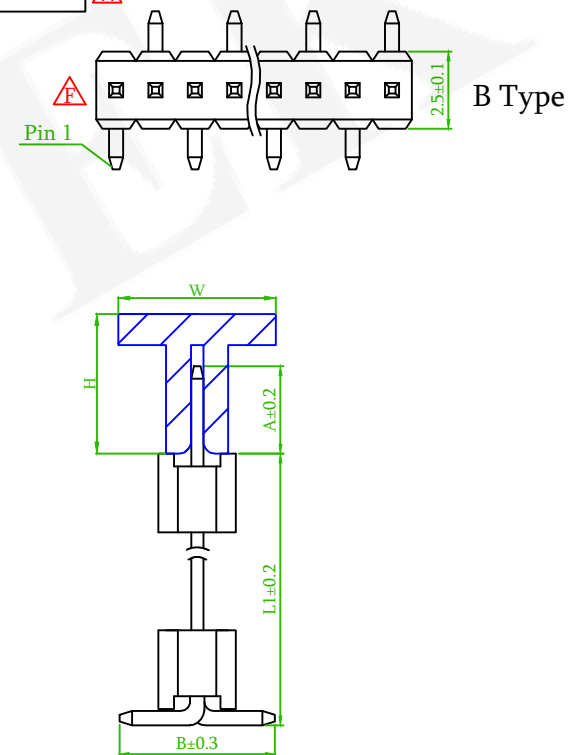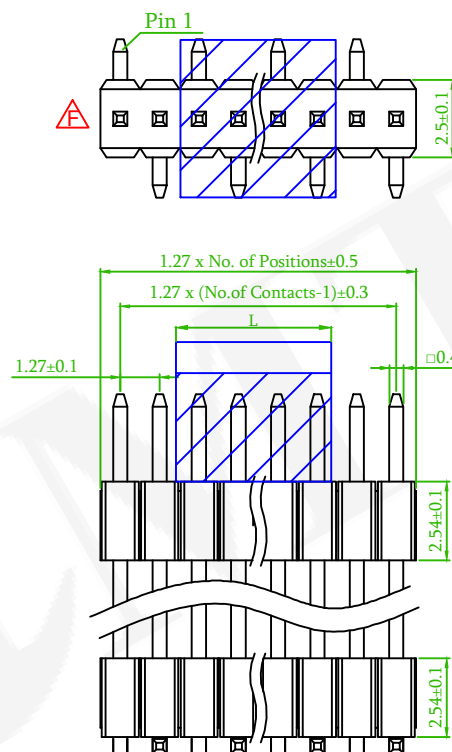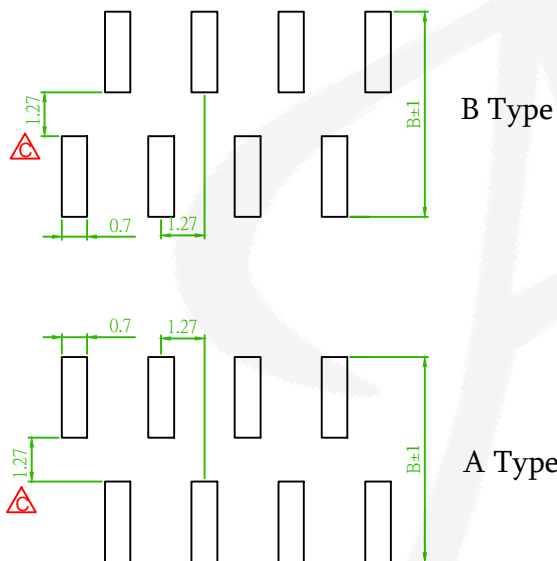

Old Part No. : PH3DM25-1XX-U

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

	EasyFlow202311140001 Add the X:Box	Gaby	2023/11/15
 x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
	ECN No.:210619 Revise the top view	Alice	2021/09/17
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DMA25-1XXXXXXXU -XXXXXXXXX-00			繪圖 DRAWN	Jeff 2016/09/19	
圖號 DRAWING NO.	GN016-GA274	版本 REV.	H	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		