





MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3MRA25-1XXXXXXU-A000000-00

1:Single Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:Non Type	N:W/O Peg	U:RoHS +Hi-Temp.	R:T/R With Cap H:T/R W/O Cap C:Tube With Cap T:Tube W/O Cap	EX:06000000 A:6.0 (Maximum Dim.A=6.0)
--------------	-----------------------------------	--	---	------------	-----------	---------------------	--	--

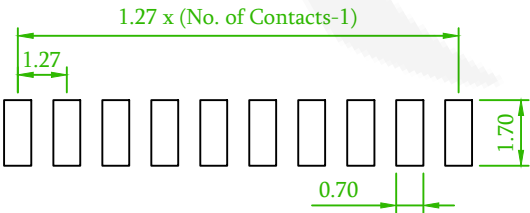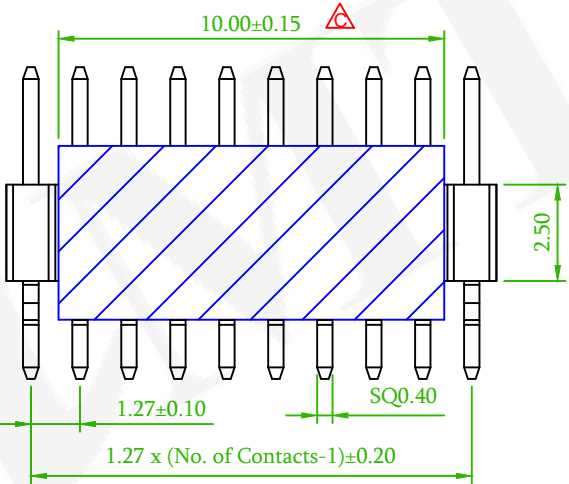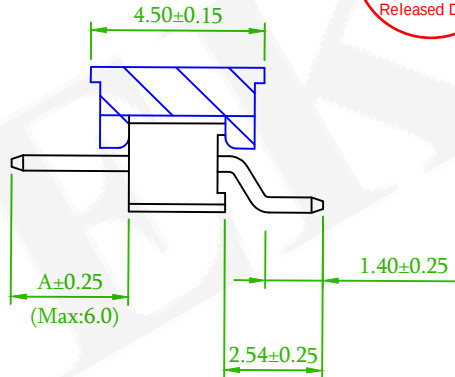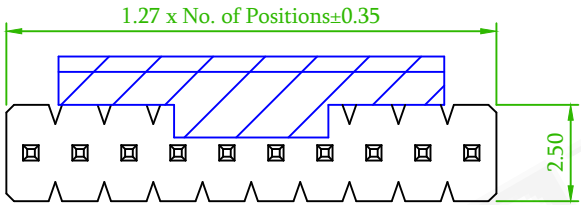

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3MR-1XX-U

ECN NO.:231008	Revise the drawing	David	2023/10/25
ECN NO.:230707	Revise the drawing	Alice	2023/08/07
	Add the cap	C	2017/03/15 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm PLASTIC HEIGHT 2.5mm SMT R/A				頁數 Page	1/1
品號 PART NO.	5PH3MRA25- 1XXXXXXU-XXX000000-00				繪圖 DRAWN	Mia 2016/10/07
圖號 DRAWING NO.	GW041-GA264	版本 REV.	E	核對 CHECKED	Jonny 2016/10/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/07	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	