

MATERIAL

Insulator: Nylon 9T,UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH3MRA25-2XX-XX

XX-XU-A000000-00

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash	S0: Selective Au
GA: Au 5u"	SA: Selective Au 5u"
GB: Au 10u"	SB: Selective Au 10u"
GC: Au 20u"	SC: Selective Au 20u"
GD: Au 30u"	SD: Selective Au 30u"
T0: Tin Plated	TE: Tin 200u"




N: Non Type

U: RoHS
+Hi-Temp.



EX: 06000000
A: 6.0
(Maximum
Dim. A=7.0)

N: W/O Peg

R: T/R With Cap
H: T/R W/O Cap
C: Tube With Cap
T: Tube W/O Cap

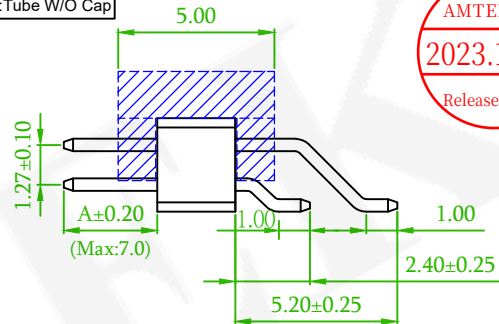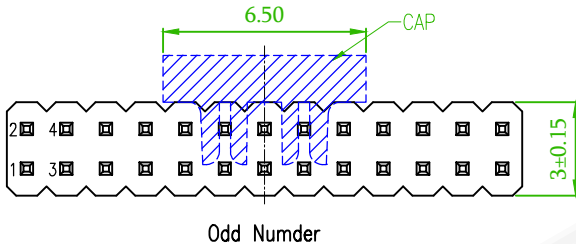

AMTEK 糧德
2023.10.31
Released DCC

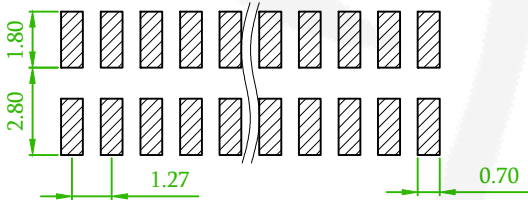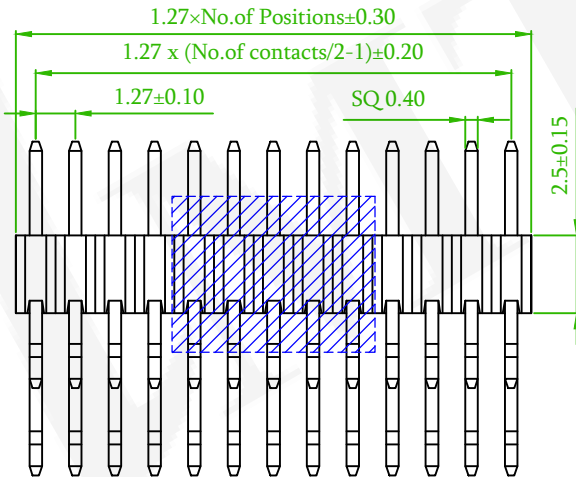

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3MR-2XX-U

ECN NO.:231008	Revise the drawing	David	2023/10/25
ECN NO.:230707	Revise the drawing	Alice	2023/08/07
	Add the drawing	Mia	2017/08/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm SMT R/A TYPE PLASTIC HEIGHT 2.5mm				頁數 Page	1/1
品號 PART NO.	5PH3MRA25-2XXXXXXXU- XXX000000-00				繪圖 DRAWN	Jeff 2016/09/13
圖號 DRAWING NO.	GN003-GA309	版本 REV.	E	核對 CHECKED	Johnny 2016/09/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/13	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		