

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black 

Contact Pin: Brass 

ORDER INFORMATION


5 P H 3 M S A 1 0 - 1 X X X X N X X U - A B C - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	A: A Type (Odd & Even Pin) B: B Type (Only Even Pin)	RoHS	EX:030055017 A:3.0 B:5.5 C:1.7
				N: W/O Peg	R: T/R With Cap H: T/R W/O Cap C: Tube With Cap (5 Pin ) T: Tube W/O Cap (5 Pin )	

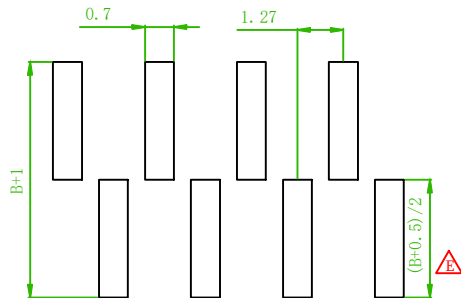

Recommended PCB Layout
(PCB TOLERANCE ±0.1)


A TYPE

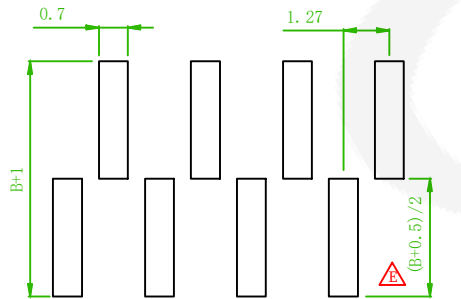


Recommended PCB Layout
(PCB TOLERANCE ±0.1)

B TYPE



CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

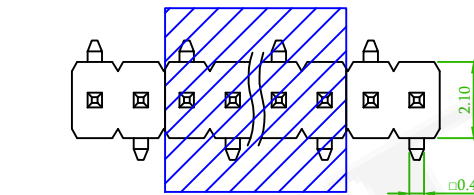

A TYPE

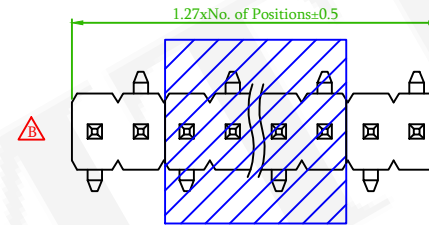

B TYPE

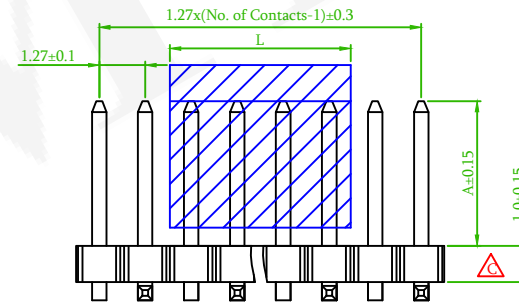

Old Part No. : PH3M10-1XX-U

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
	ECN No. : 170503. Add annotations.	F	2017/06/12 Gary
	Modify P.C.B Layout	E	2017/03/20 Gary
	Modify order information	D	2017/02/06 Gary
	update the drawing	C	2016/03/09 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3MSA10-1XXXXNXXU-XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/09
圖號 DRAWING NO.	GN016-GA278	版本 REV.	H	核對 CHECKED	Owen 2015/08/09	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/09	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	第三 ANGLE PROJECTION		