

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 3 M S A 2 5 - 1 X X X X X X X U - A B C - 0 0


1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:W/O Peg	A: A Type (Odd & Even Pin) B: B Type (Only Even Pin)	U: RoHS +Hi-Temp.	EX:030055017 A:3.0 B:5.5 C:1.7
--------------	-----------------------------------	--	---	-----------	---	----------------------	---




CAP	L	W	H (Ref.)
≧ 1 x 2 Pin	5.0	5.08	4.5





A TYPE

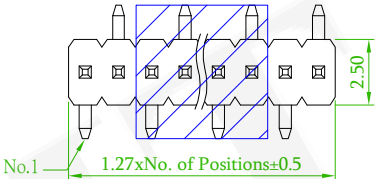

B TYPE

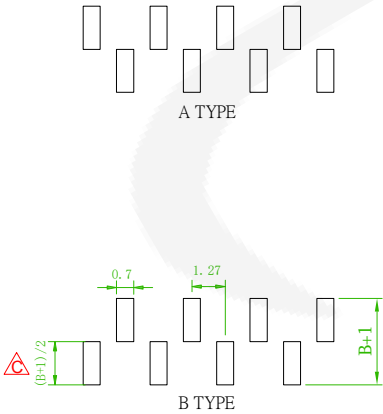

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

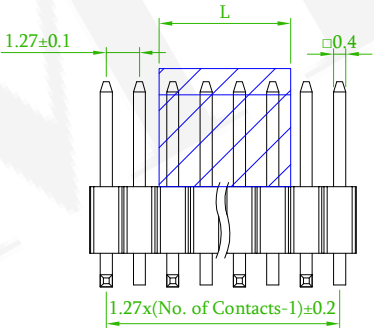

Old Part No. : PH3M25-1XX-U

△x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△	ECN No. : 170503. Add annotations.	Gary	2017/06/12
△	Modify P.C.B Layout	Gary	2017/03/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3MSA25-1XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/07
圖號 DRAWING NO.	GN016-GA282	版本 REV.	F	核對 CHECKED	John 2015/08/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/07	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		