

MATERIAL

Insulator: PA9T, UL94V-0, Black

Contact Pin: Brass


ORDER INFORMATION

5 P H 3 M S A 2 5 - 2 X X X X X X U - A B C - 0 0


2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg P: With Peg	U: RoHS +Hi-Temp.	EX: 030055030 A: 3.0 B: 5.5 C: 3.0
				R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap		





AMTEK 耀德
2023.05.30
Released DCC

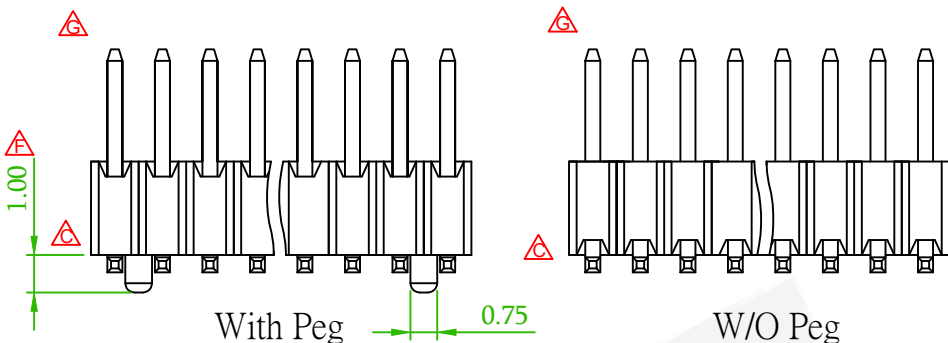

CAP	L	W	H (Ref.)
≥ 2 x 2 Pin	5.08	4.0	3.75

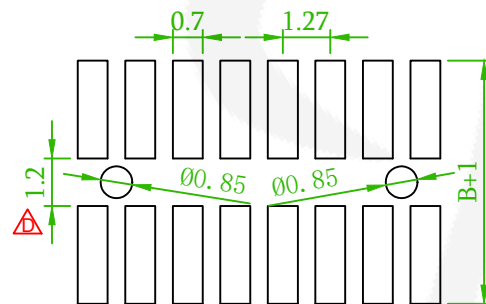


Recommended PCB Layout
(PCB TOLERANCE ±0.1)

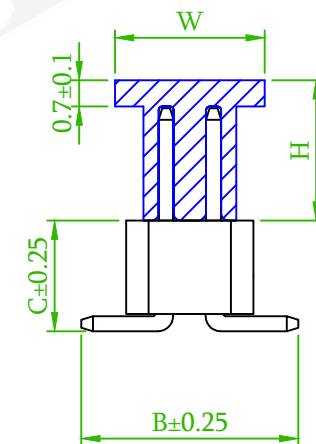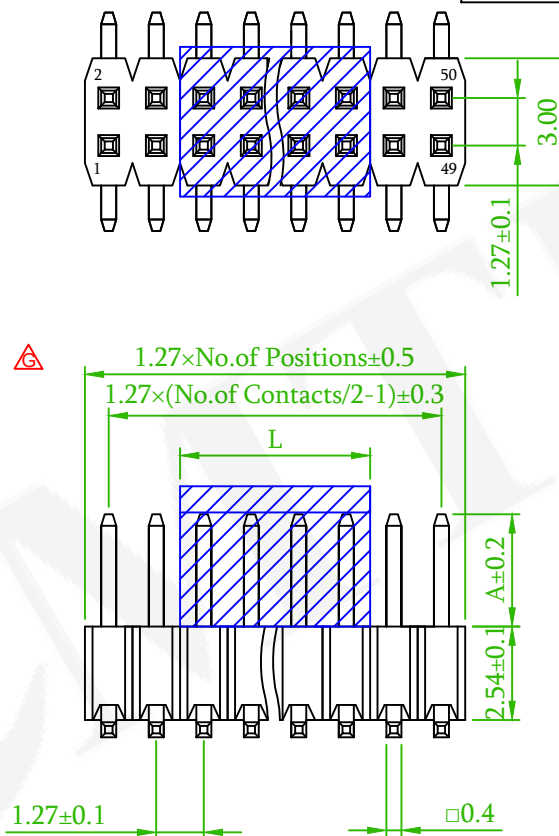

Old Part No. : PH3M25-2XX-U

△x3	QEC 230510.: Revise the Drawing	Rex	2023/05/25
△x1	ECN 210116.: Revise the Peg	David	2021/02/02
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△	Modify P.C.B Layout	Gary	2017/03/20
△	Revise the drawing	Gary	2017/03/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3MSA25-2XXXXXXXU-00				繪圖 DRAWN	Roy 2015/08/07
圖號 DRAWING NO.	GN016-GA283	版本 REV.	G	核對 CHECKED	John 2015/08/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/07	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		