


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 3 R D A 1 0 - 1 X X X X X X X U - A B C - 0 0

1:Single Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA:5u"	S0:Selective Au SA:5u"	N:Non Type	RoHS	EX:040024030 A:4.0 B:2.4 C:3.0
		GB:10u"	SB:10u"	N:W/O Peg	X:Box C:Tube With Cap	
		GC:20u"	SC:20u"			
		GD:30u"	SD:30u"			
		T0:Tin Plated	TE:Tin 200u"			

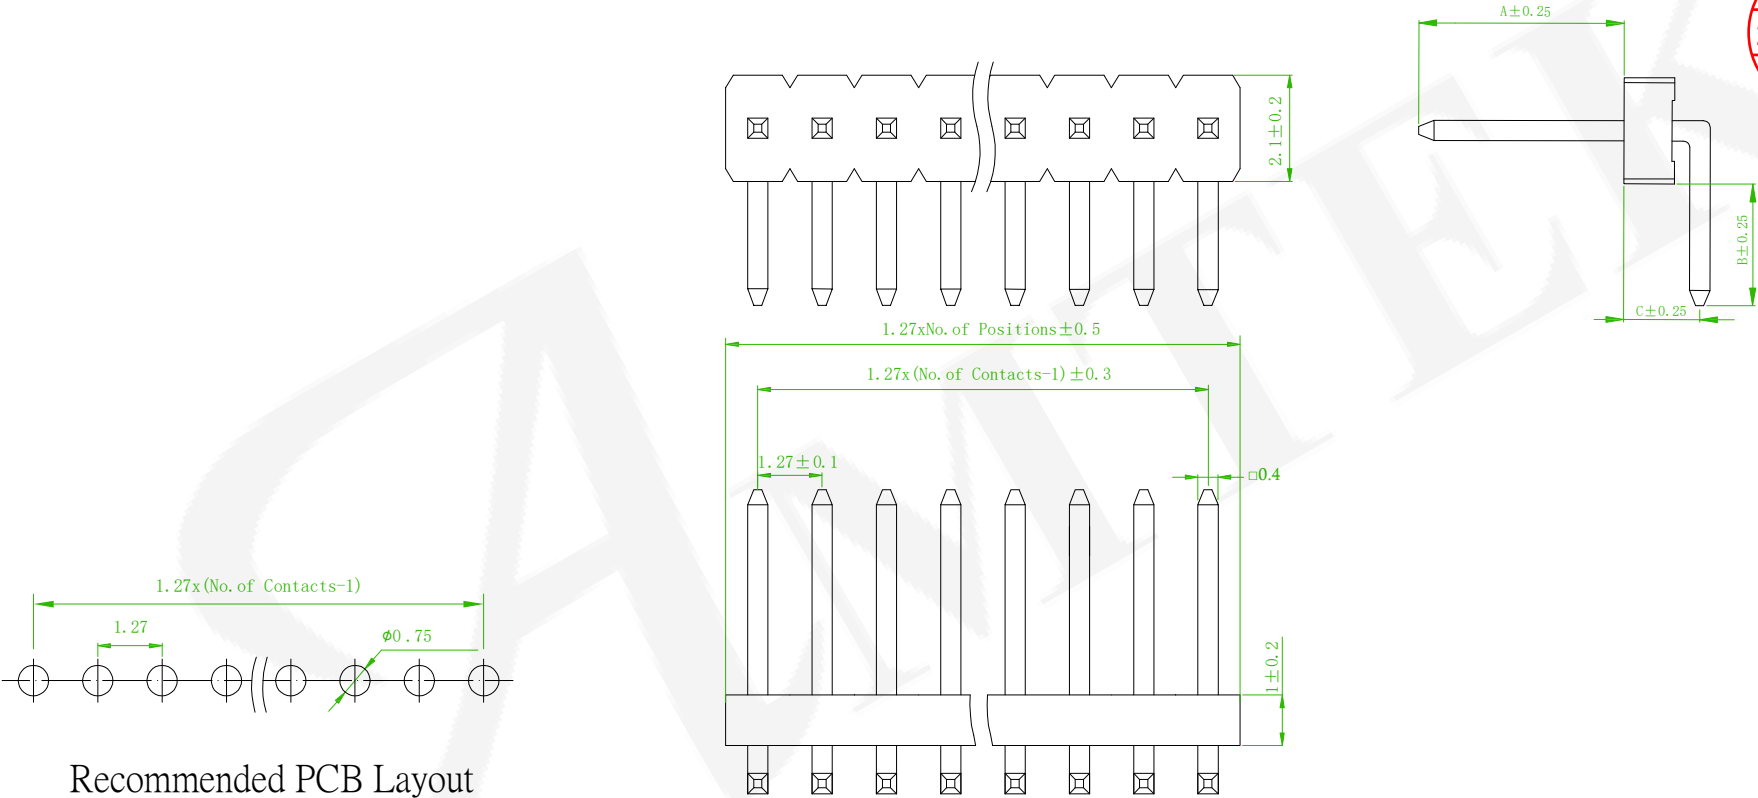

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. : PH3R10-1XX-U

△x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
△x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
△x3	Modify order information	Gary	2017/02/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3RDA10-1XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Joey 2016/07/25
圖號 DRAWING NO.	GN016-GA285	版本 REV.	D	核對 CHECKED	Boris 2016/07/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/25	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		