

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass



ORDER INFORMATION

5PH3RDA10-2XX-XX


2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated	S0: Selective Au SA: 5u" SB: 10u" SC: 20u" SD: 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	X: Box C: Tube With Cap M: T/R With Mylar	RoHS	EX: 065012020 A: 6.5 B: 1.2 C: 2.0
-------------	-----------------------------------	---	--	---------------------------	---	------	---



With Mylar

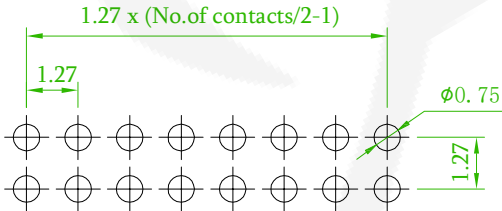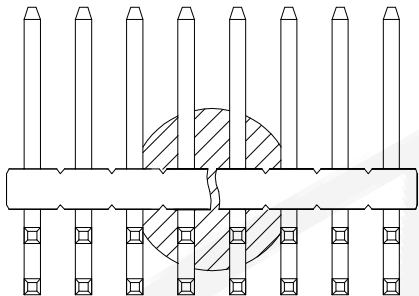

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

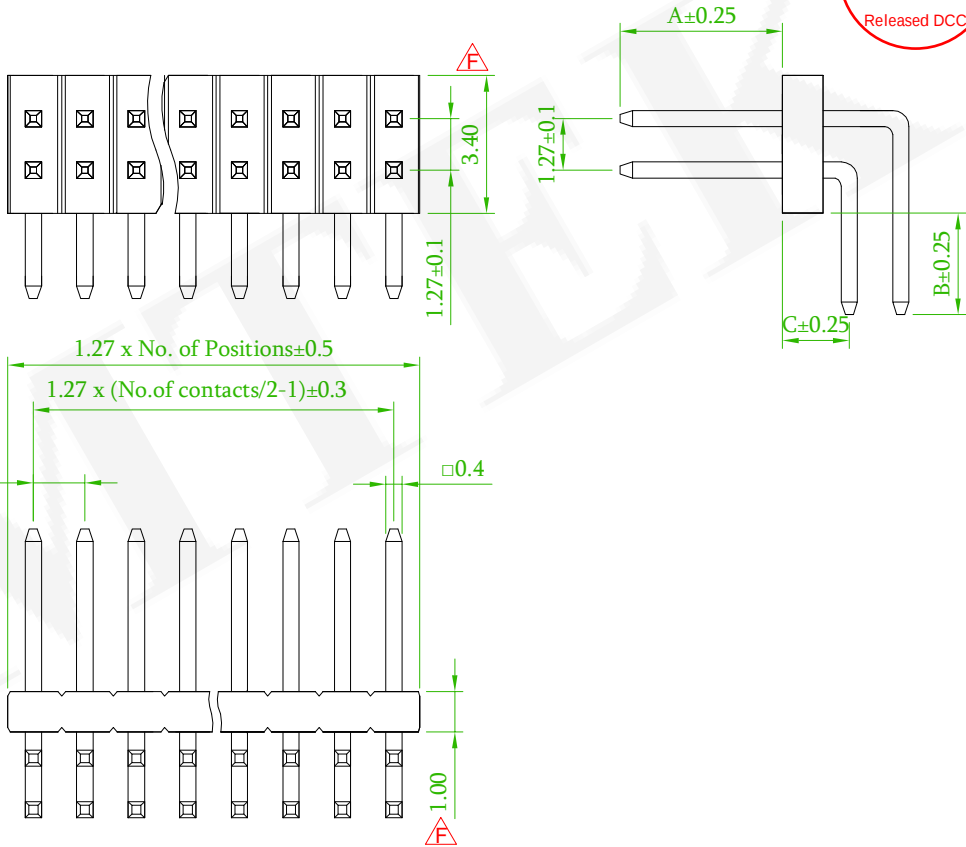

Old Part No. : PH3R10-2XX-U

Rev. 1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
Rev. 2	Add the Dimintions	Benson	2022/08/19
Rev. 3	Add package option(M:T/R With Mylar)	Nick	2020/02/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3RDA10-2XXXXXXXU-XXXXXXX-00				繪圖 DRAWN	Roy 2015/08/12
圖號 DRAWING NO.	GN016-GA286	版本 REV.	G	核對 CHECKED	John 2015/08/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/12	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		