

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 3 R D A 1 5 - 2 X X X X X X X U - A B C - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash
GA: 5u"
GB: 10u"
GC: 20u"
GD: 30u"
T0: Tin Plated

S0: Selective Au
SA: 5u"
SB: 10u"
SC: 20u"
SD: 30u"
TE: Tin 200u"

N: Non Type

N: W/O Peg




RoHS

X: Box
C: Tube With Cap
R: T/R With Cap


EX: 065012020
A: 6.5
B: 1.2
C: 2.0



AMTEK 耀德
2023.10.05
Released DCC

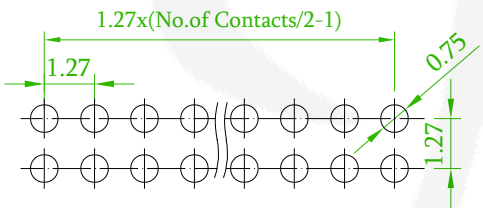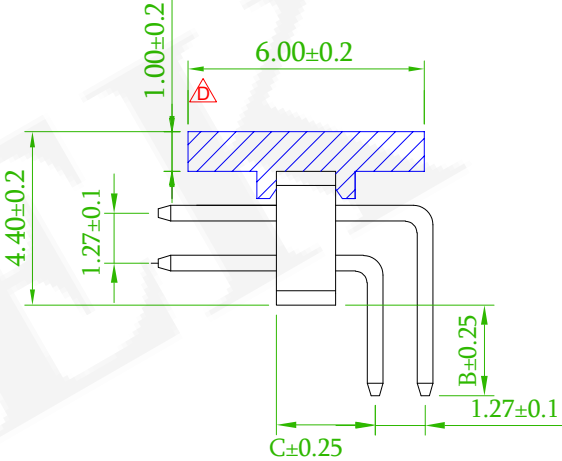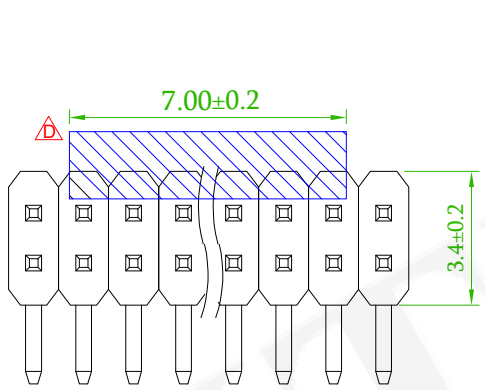

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

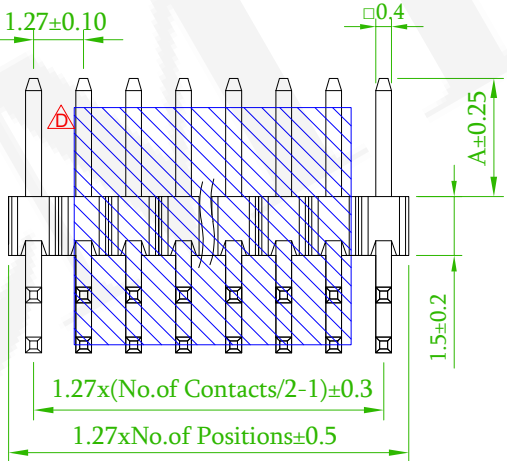

Old Part No. : PH3R15-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
A2	Add : T/R With Cap	David	2019/07/30
A3	Add : Cap	David	2019/03/21



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3RDA15-2XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/12
圖號 DRAWING NO.	GN016-GA288	版本 REV.	F	核對 CHECKED	John 2015/08/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/12	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		