


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass




ORDER INFORMATION

5 P H 3 R D A 2 0 - 2 X X X X X X X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated	S0: Selective Au SA: 5u" SB: 10u" SC: 20u" SD: 30u" TE: Tin 200u"	N: Non Type	N: W/O Peg	X: Box C: Tube With Cap M: T/R With Mylar	RoHS	EX: 065012030 A: 6.5 B: 1.2 C: 3.0
-------------	-----------------------------------	---	--	-------------	------------	---	------	---

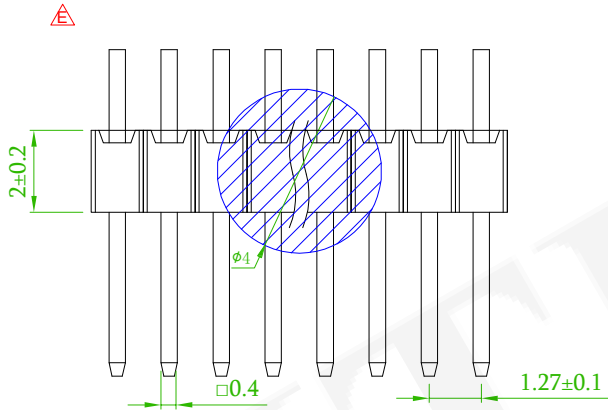

AMTEK 耀德
2023.10.05
Released DCC

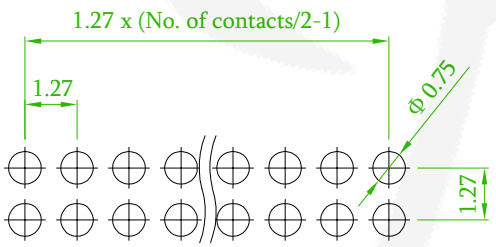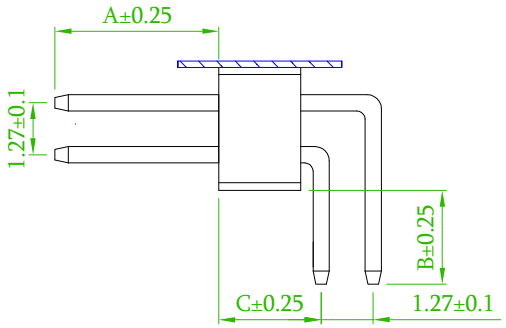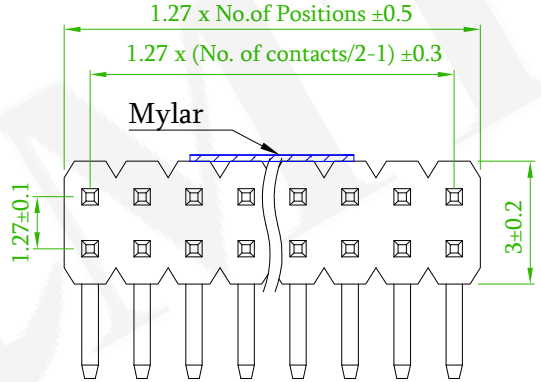

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3R20-2XX-U

x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
x1	Revise the Drawing	Rex	2023/05/25
x1	Add the package option T/R With Mylar	Benson	2020/11/23
x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3RDA20-2XXXXXXXU-00				繪圖 DRAWN	Joey 2016/08/03
圖號 DRAWING NO.	GN110-GA307	版本 REV.	F	核對 CHECKED	Boris 2016/08/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/03	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		