



MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 3 R D A 2 5 - 2 X X X X X X X U - A B C - 0 0

2:Dual Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA: 5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"	N:Non Type N:W/O Peg	X:Box C:Tube With Cap	RoHS	EX:065012020 A:6.5 B:1.2 C:2.0
------------	-----------------------------------	---	---	-------------------------	--------------------------	------	---

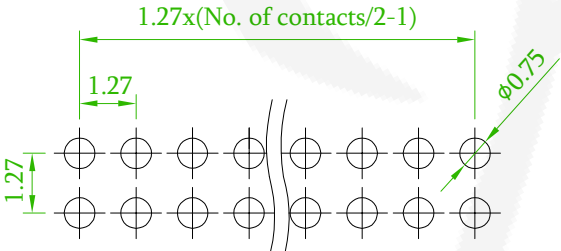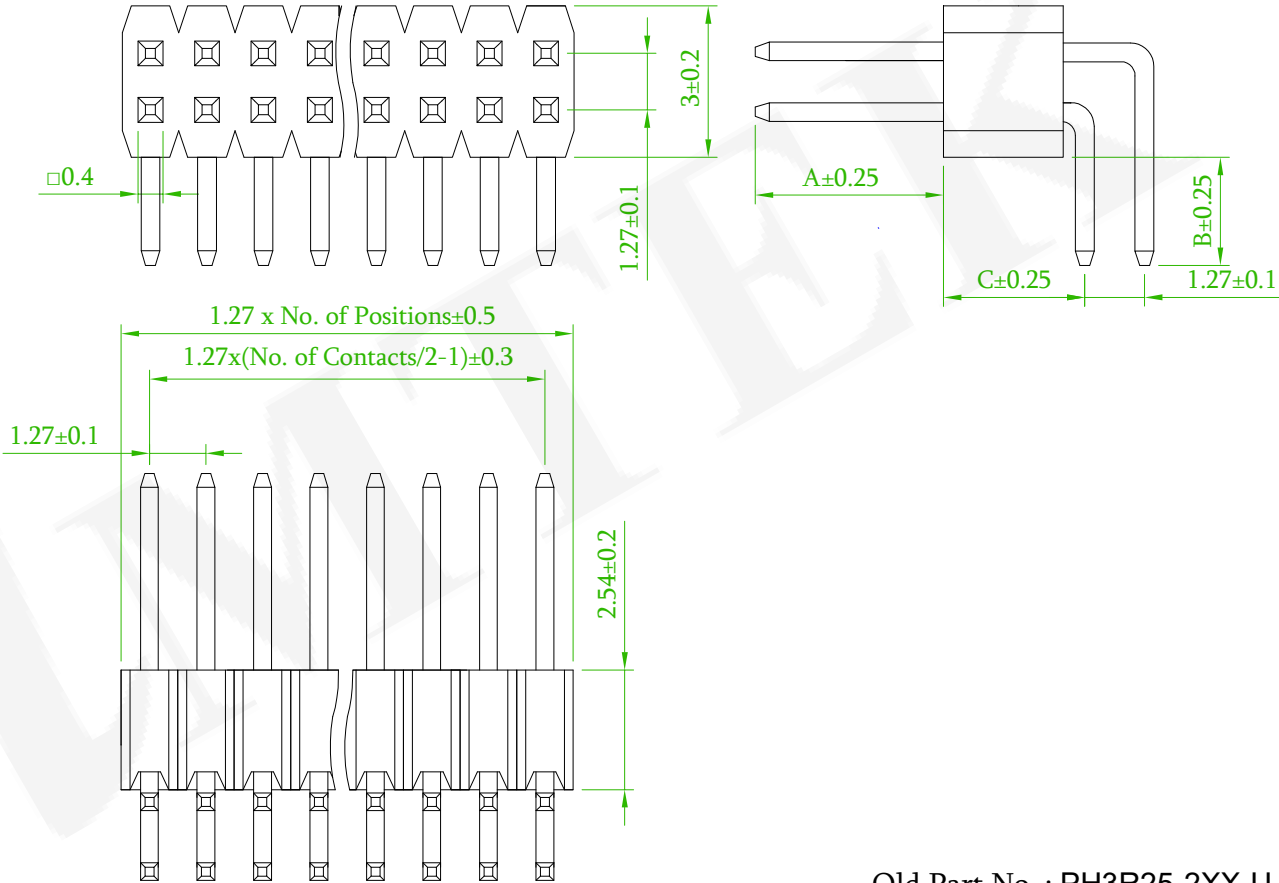

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3R25-2XX-U

△ x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
△ x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
△ x3	Modify order information	Gary	2017/02/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3RDA25- 2XXXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/12
圖號 DRAWING NO.	GN016-GA292	版本 REV.	D	核對 CHECKED	John 2015/08/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/12	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		