

MATERIAL

Insulator: Nylon 9T,UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH3SDA10-1XX-XX

X

X

X

U

-

A

B

000

-

0

0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated

S0:Selective Au
SA:5u"
SB:10u"
SC:20u"
SD:30u"
TE:Tin 200u"

N:Non Type

N:W/O Peg

X:Box


R:T/R With
CAP

H:T/R W/O
CAP

RoHS

EX:040023000
A:4.0
B:2.3

AMTEK 耀德
2023.12.11
Released DCC

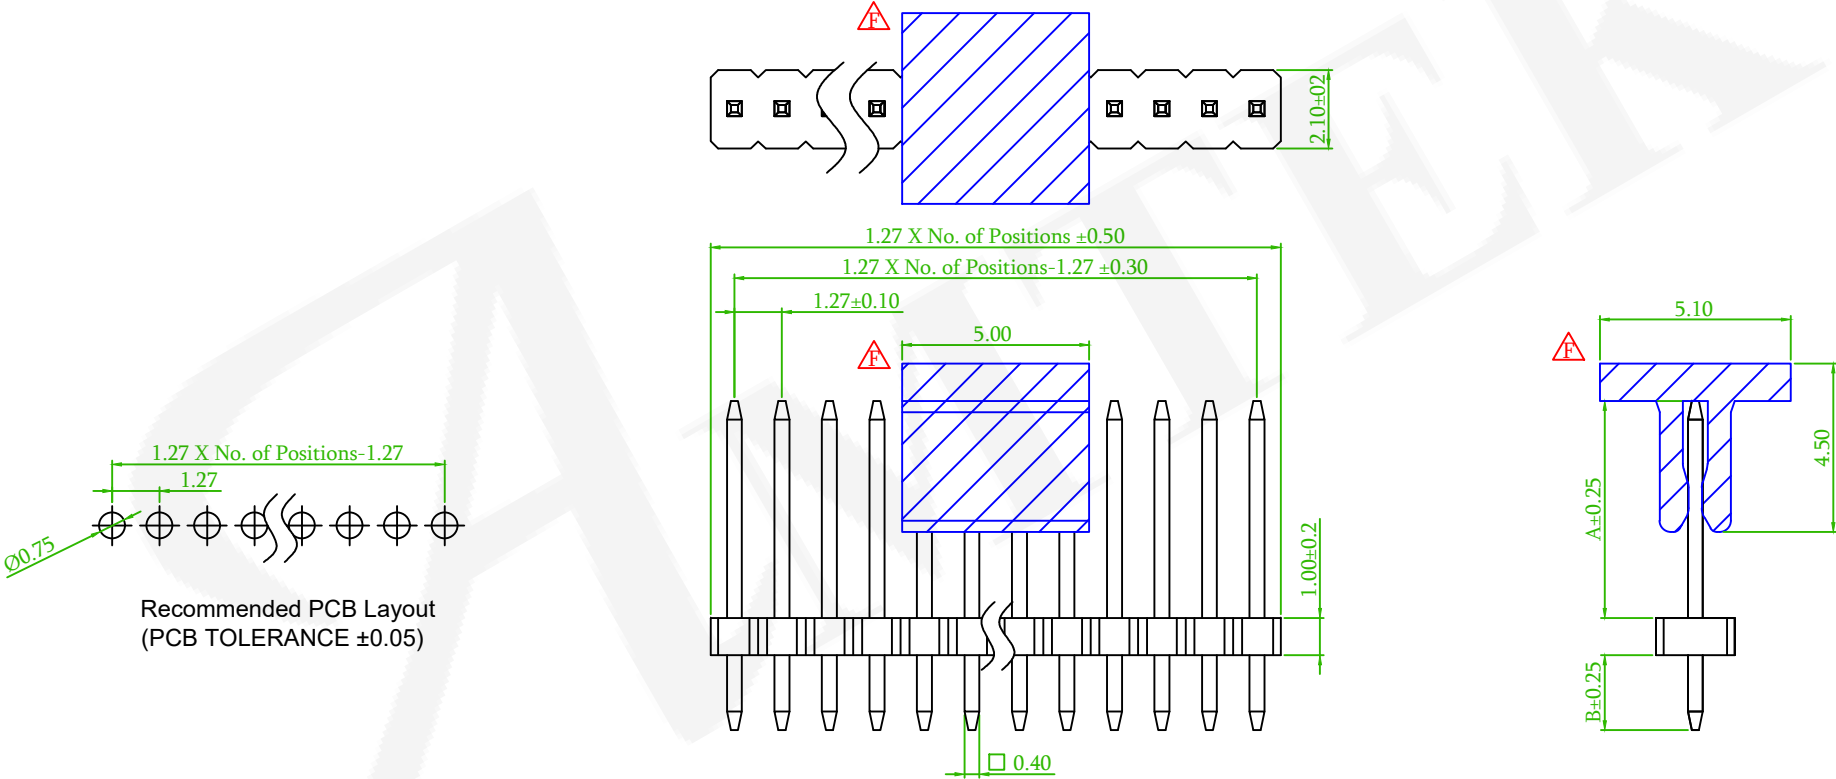

Old Part No. : PH3S10-1XX-U

	EasyFlow:202312070009	Alice	2023/12/08
	EasyFlow202308110014:Revise the drawing	Alice	2023/08/14
	ECN NO.:230707 Revise the drawing	Alice	2023/08/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3SDA10-1XXXXXXXU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/08
圖號 DRAWING NO.	GN016-GA294	版本 REV.	G	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2016/09/08	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		