

MATERIAL

Insulator: Nylon 9T, UL 94V-0,Black 

Contact Pin: Brass 

ORDER INFORMATION

5 P H 3 S D A 1 0 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

S0:Selective Au

SA:5u"

SB:10u"

SC:20u"

SD:30u"

TE:Tin 200u"

N:Non Type

N:W/O Peg


RoHS

X:Box 



EX:040023000

A:4.0

B:2.3 

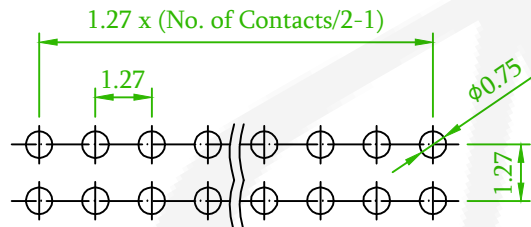


Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

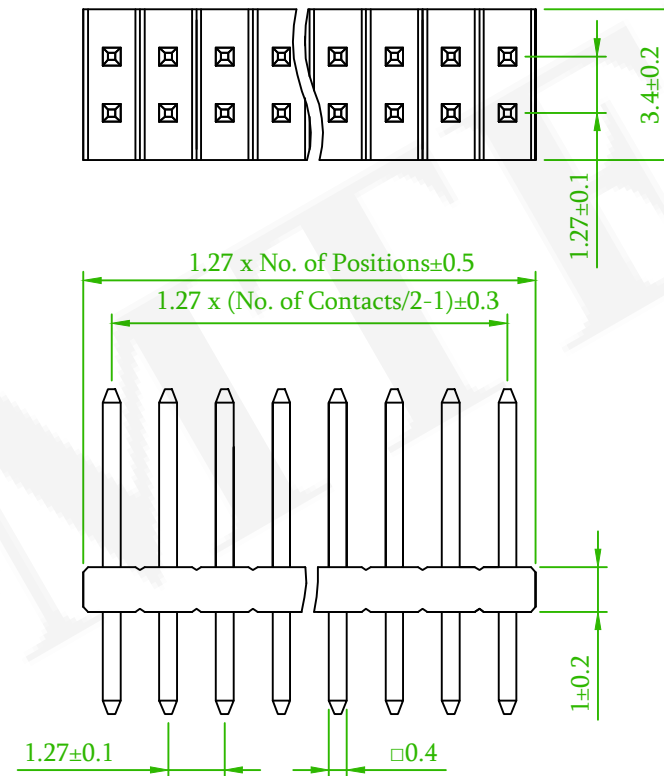

Old Part No. : PH3S10-2XX-U

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
 x1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
 x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/19
 x3	Modify order information	Gary	2017/02/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3SDA10- 2XXXXNNXU-XXXXXX000-00			繪圖 DRAWN	Roy 2015/08/18	
圖號 DRAWING NO.	GN016-GA295	版本 REV.	F	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		