

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3SDA15-2XXXXNNU-XXX XXX 000-00




2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated	S0: Selective Au SA: 5u" SB: 10u" SC: 20u" SD: 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	RoHS	EX: 040023000 A: 4.0 B: 2.3
					X: Box B: Bag R: T/R With CAP (See Table1)	



AMTEK 糧德
2023.10.05
Released DCC

NOTE 1

Package For Tape & Reel With CAP:
5PH3SDA15-2XXXXNNU- XXX XXX 000-00
R: T/R With Cap
DIM. A
DIM. B
23mm MAX
1.5
DIM. A add 1.5mm add DIM. Bmm
must be less than 23mm.

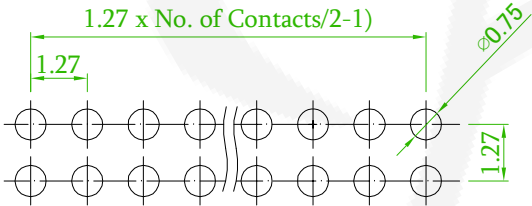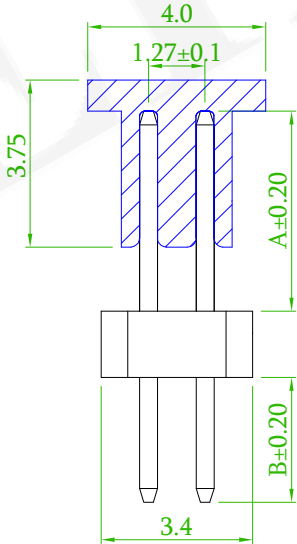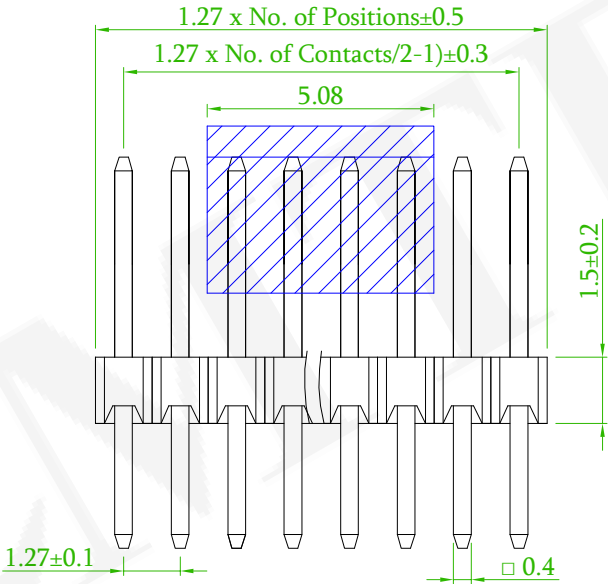

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3S15-2XX-U

△x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/08
△x1	ECN No.:210619 Cancel the top view	Benson	2021/07/10
△x3	Add the T/R with Cap	Benson	2020/09/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 1.27mm D/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.		5PH3SDA15-2XXXXXXXU -XXXXXX000-00			繪圖 DRAWN	Roy 2015/08/18
圖號 DRAWING NO.		GN016-GA297	版本 REV.	G	核對 CHECKED	Josh 2018/03/23
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/03/23
公差 TOLERANCE		.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	