

MATERIAL

Insulator: Nylon 9T, UL 94V-0,Black
Contact Pin:Brass

ORDER INFORMATION

5PH3SDA17-1XXXXNNRU-XXX XXX 000-00

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

S0:Selective Au

GA:5u"

SA:5u"

GB:10u"

SB:10u"

GC:20u"

SC:20u"

GD:30u"

SD:30u"

TO:Tin Plated

TE:Tin 200u"

N:Non Type

RoHS

N:W/O Peg

X:Box

R:T/R With Cap

R:T/R With Cap

EX:040023000

A:4.0



B:2.3



NOTE 1


Package For Tape & Reel With CAP:

5PH3SDA17-1XXXXNNRU-XXX XXX 000-00






DIM.A
DIM.B
R:T/R With Cap

DIM.A add DIM.B
must be less than 23mm.

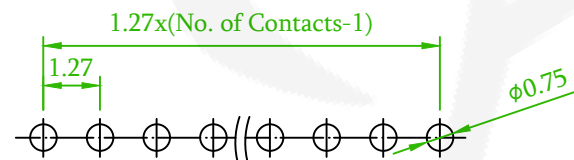

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

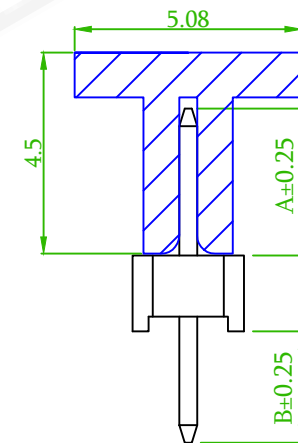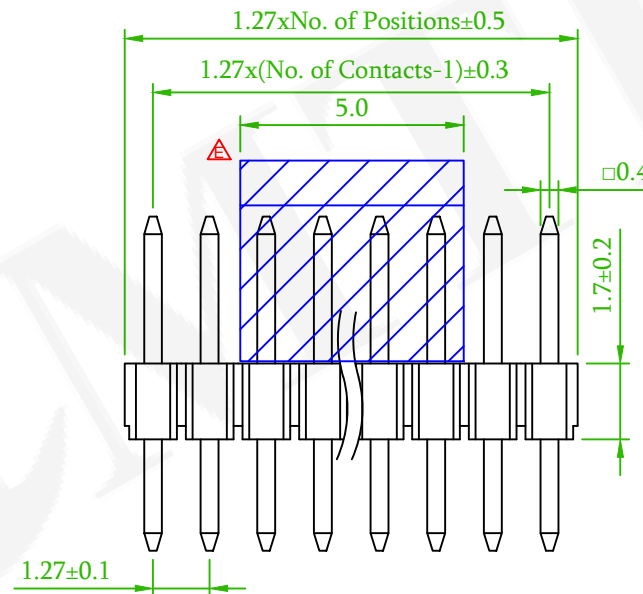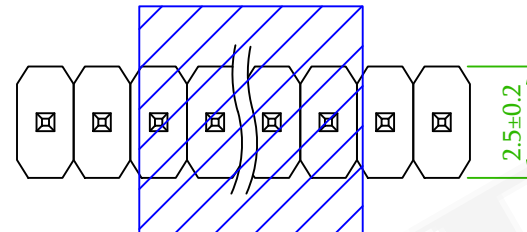

Old Part No. : PH3S17-1XX-U

△x4

Add the Cap & Package

David

2023/03/10

△x1

ECN No.:180310,Remove the Cap & Revise the Package option .

Roy

2018/03/23

△x1

ECN:170910,Delete the Packing:B:Bag

Kilin


2017/10/31

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



品名 TITLE	PIN HEADER 1.27mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3SDA17-1XXXXXXXU-00				繪圖 DRAWN	Roy 2015/08/18
圖號 DRAWING NO.	GN016-GA298	版本 REV.	E	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		