

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3SDA20-1XX-XX

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated

S0:Selective Au
SA:5u"
SB:10u"
SC:20u"
SD:30u"
TE:Tin 200u"

XX-AB000-00

N:Non Type

N:W/O Peg


RoHS

X:Box




EX:040023000
A:4.0
B:2.3



AMTEK 糧德
2023.10.05
Released DCC

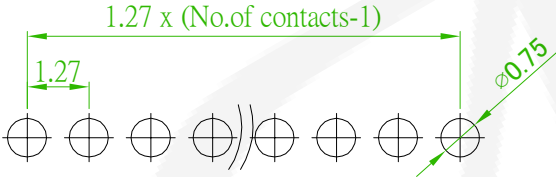

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

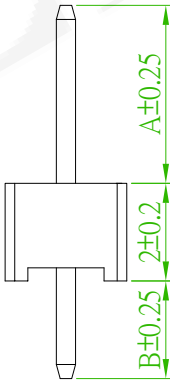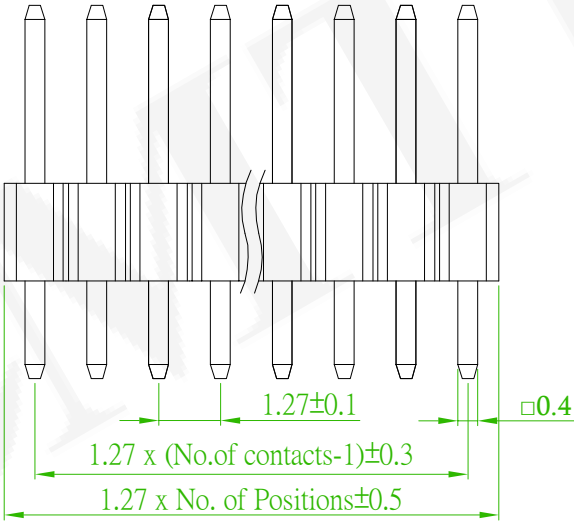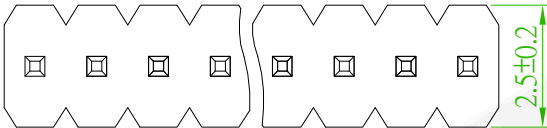

Old Part No. : PH3S20-1XX-U

△ x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/08
△ x1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
△ x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 1.27mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.		5PH3SDA20-1XXXXXXXU -XXXXXX000-00			繪圖 DRAWN	Jeff 2016/09/12
圖號 DRAWING NO.		GN016-GA300	版本 REV.	E	核對 CHECKED	Josh 2018/03/23
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/03/23
公差 TOLERANCE		.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	