

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5

P

H

3

S

D

A

2

0

-

2

X

X

X

X

X

X

X

U

-

A

B

000

-

0

0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

S0: Selective Au

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

RoHS

X: Box

EX: 040023000


A: 4.0

B: 2.3


certified

Pb

RoHS Compliant

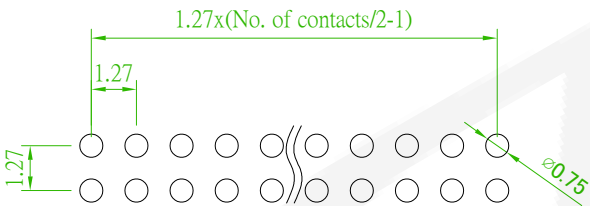

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

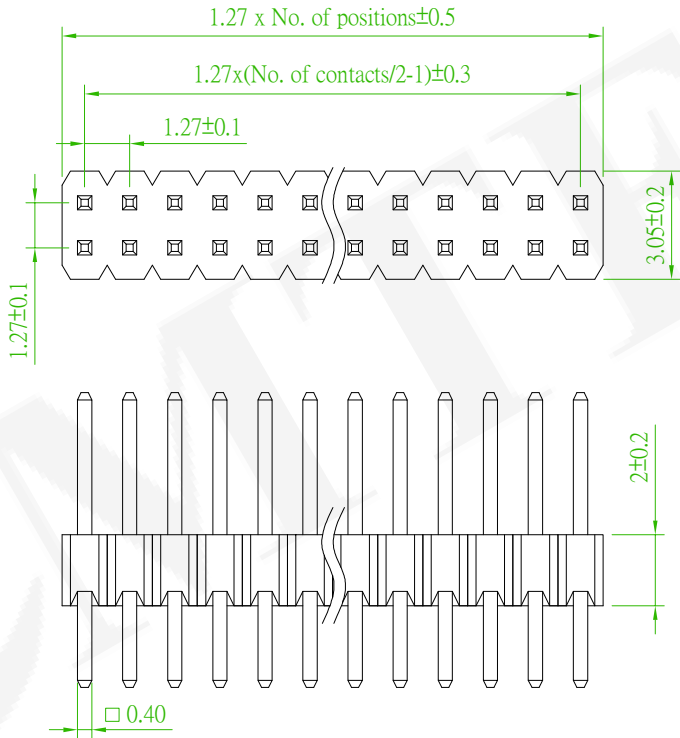

Old Part No. : PH3S20-2XX-U

△Qx1	ECN NO.:230707 Revise the drawing	Alice	2023/08/08
△Bx1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH3SDA20-2XXXXXXXU- XXXXXX000-00				繪圖 DRAWN	Mia 2018/03/01
	圖號 DRAWING NO.	GN016-MC971	版本 REV.	C	核對 CHECKED	Josh 2018/03/23	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		