


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass



ORDER INFORMATION

5 P H 3 S D A 2 5 - 1 X X X X X X X U - A B 000 - 0 0

1:Single Row	No. of contacts per row(02~50)	G0:Gold Flash GA:5u" GB:0u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"	N:W/O Peg	N:Non Type	RoHS	EX:040023000 A:4.0 B:2.3
--------------	--------------------------------	--	--	-----------	------------	------	--------------------------------

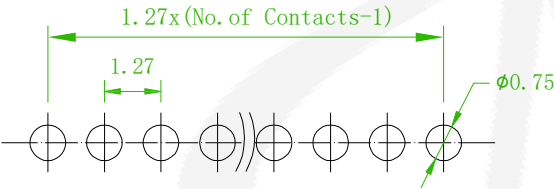

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

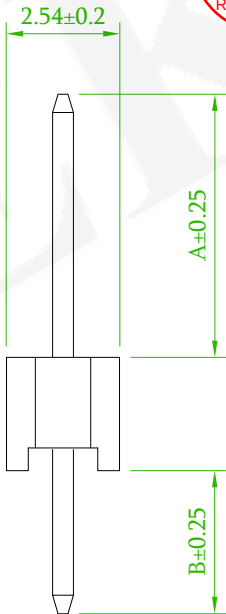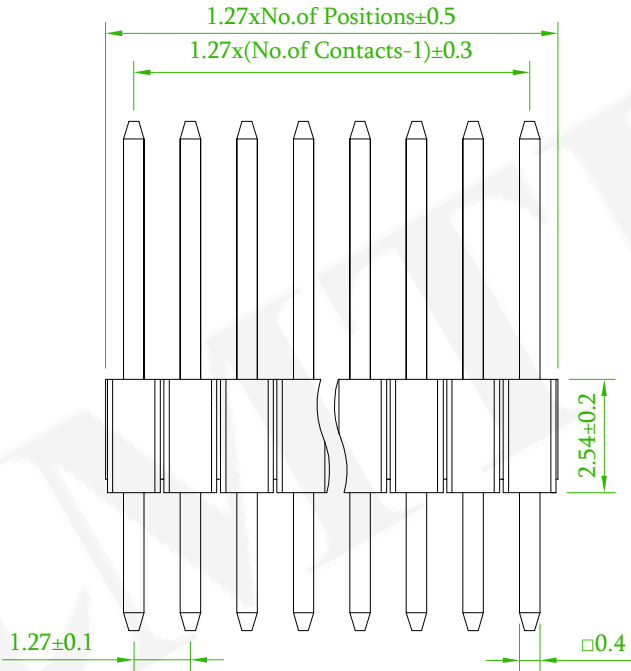

Old Part No. : PH3S25-1XX-U

x1	ECN NO.:230707 Revise the drawing	Alice	2023/08/08
x1	ECN No.:210619 Cancel the top view	Benson	2021/07/10
x1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3SDA25- 1XXXXXXXXU-XXXXXX000-00				繪圖 DRAWN	Jeff 2016/04/22
圖號 DRAWING NO.	GN016-GA301	版本 REV.	F	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		