

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH4DDA25-1XXXX-XX

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0:Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

X

X

X

U

N:Non Type

N:W/O Peg


B:Bag
X:Box
T:Tube

U:RoHS
+Hi-Temp.

EX:024060030
A:2.4
L1:6.0
B:3.0



AMTEK 耀德
2023.10.25
Released DCC

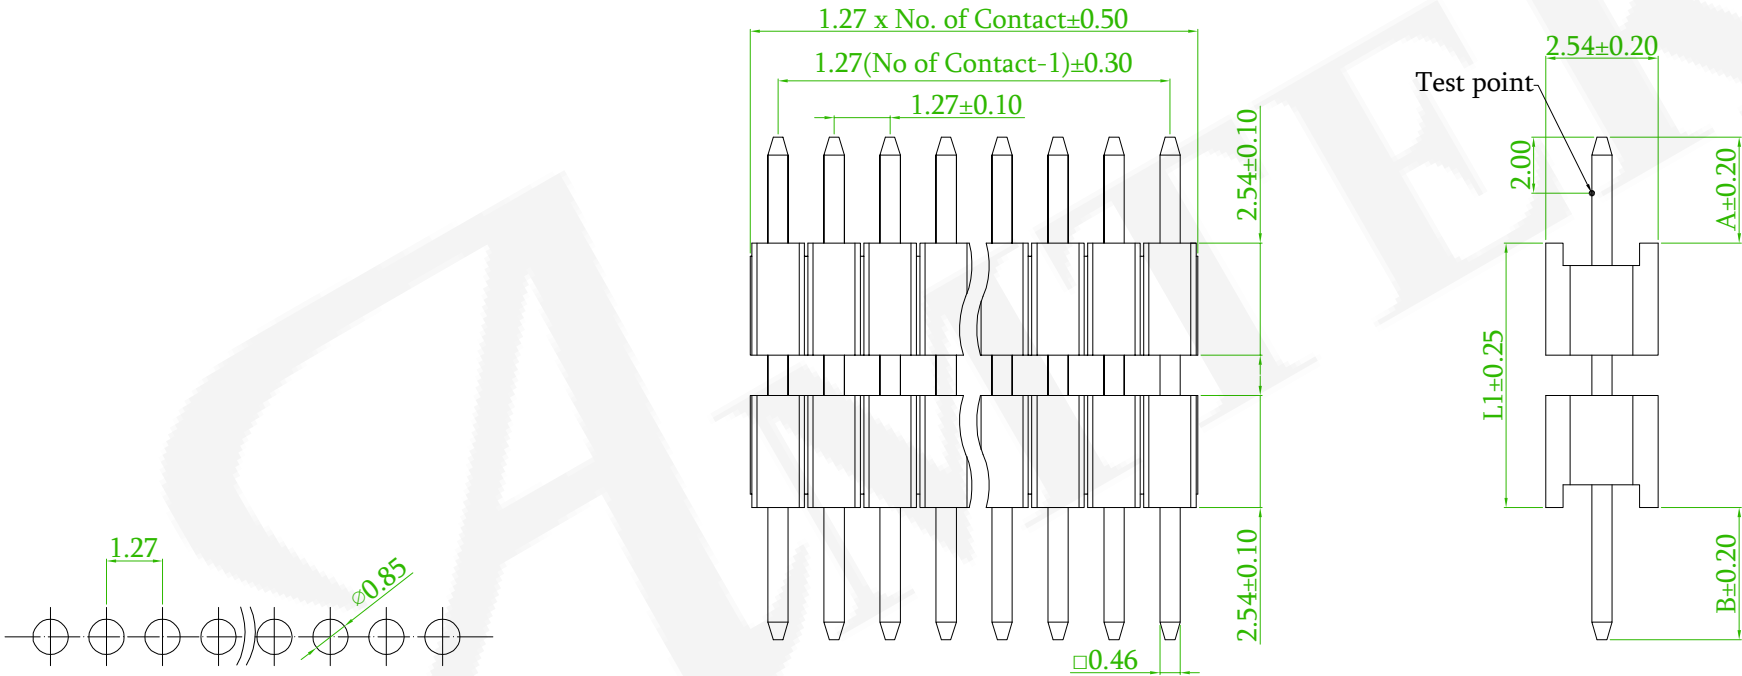

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH4DDA25-1XXXXXXXU-XXXXXXX-00				繪圖 DRAWN	Eric 2019/02/14
	圖號 DRAWING NO.	GN110-EA667	版本 REV.	C	核對 CHECKED	Josh 2019/02/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/14	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
	ECN No.:210619 Cancel the top view	Alice	2021/09/16