

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 4 D M A 1 7 - 1 X X X X X X U - A/L1/B - 0 0


1:Single Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"	N:W/O Peg	A:A Type (Odd & Even Pin) B:B Type (Only Even Pin)	RoHS	EX:060080050 A:6.0(060) L1:8.0(080) B:5.0(050)
						C:Tube With cap (5 PIN t) T:Tube W/O cap (5 PIN t)	H:T/R W/O cap R:T/R With cap X:Box



AMTEK 耀德
2023.10.25
Released DCC

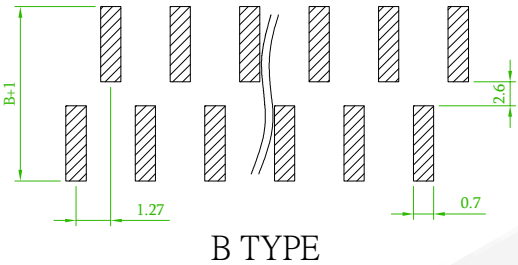


B TYPE

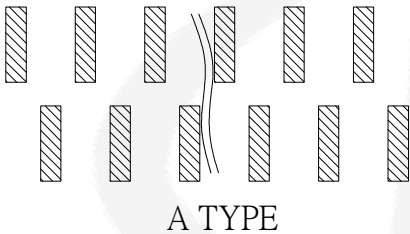


A TYPE




Recommended PCB Layout
(PCB TOLERANCE ±0.1)

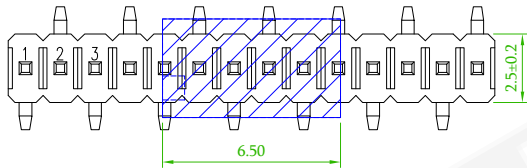

B TYPE

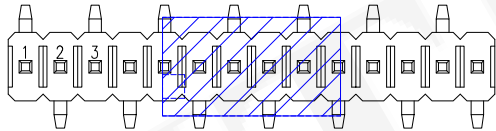

A TYPE

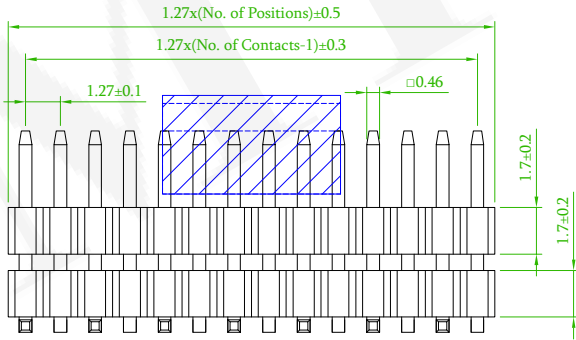

Old P/N : PH4DM17-1XX-U

D	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
C x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
B x2	ECR NO.:170503. Add annotations.	Gary	2017/06/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH4DMA17 -1XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2016/04/01
圖號 DRAWING NO.	GN003-GA013	版本 REV.	D	核對 CHECKED	Erina 2016/04/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/04/01	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		