

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 4 D M A 2 5 - 1 X X X X X X X U - A/L1/B - 0 0


1:Single Row	No. of Contacts Per Row(02~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"	A:A Type (Odd & Even Pin) B:B Type (Only Even Pin) N:W/O Peg	RoHS	EX:060080050 A:6.0(060) L1:8.0(080) B:5.0(050)
--------------	-----------------------------------	---	--	--	------	---



CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

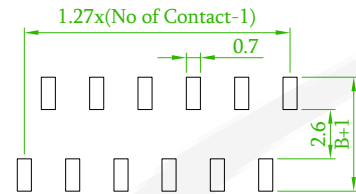


B TYPE




A TYPE



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

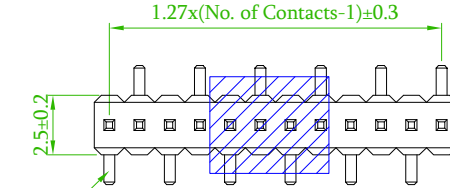

B TYPE

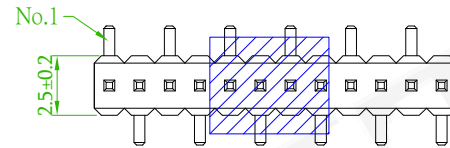

A TYPE

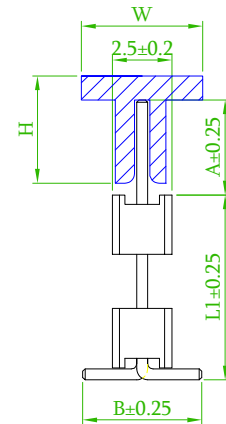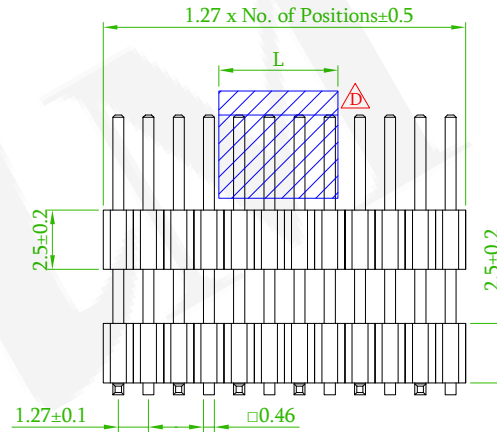

Old P/N : PH4DM25-1XX-U



△F	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
△E x2	ECN No.:210619 Revise the top view	Alice	2021/09/22
△D x1	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH4DMA25-△F 1XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Kent 2007/05/24
圖號 DRAWING NO.	GW041-GA014	版本 REV.	F	核對 CHECKED	Paul 2007/05/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/05/24	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		