

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass



ORDER INFORMATION

5 P H 4 M R A 2 5 - 1 X X X X X X X U - XXX000000 - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:NON Type


RoHS

EX:070000000
A:7.0(070)




C:Tube With cap	H:T/R W/O cap
R:T/R With cap	T:Tube W/O cap
X:Box	



AMTEK 耀德
2023.10.25
Released DCC

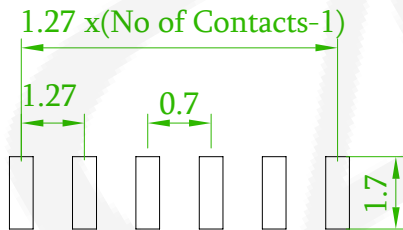

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

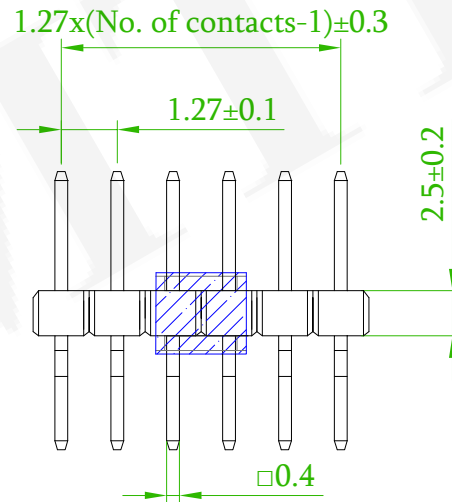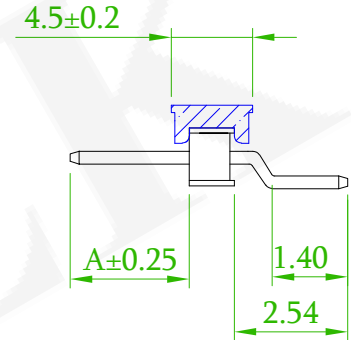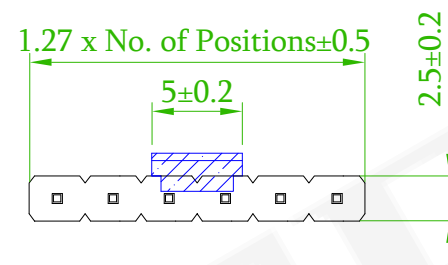

Old Part No. :PH4MR25-1XX-U

△	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
△ x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
△ x1	Revised the Drawing	Mia	2016/10/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm			頁數 Page	1/1
	品號 PART NO.	5PH4MRA25-1XXXXXXXU-XXX000000-00			繪圖 DRAWN	Mia 2016/10/06
	圖號 DRAWING NO.	GW041-KL204	版本 REV.	D	核對 CHECKED	Jonny 2016/10/06
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/06
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	