



Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

5 P H 4 M R A 2 5 - 2 X X X X X X X U - A 000 000 - 0 0

2:Daul Row	No. of contacts Per Row(02~50)	G0:Gold Flash, GA:5u"	S0:Selective Au SA:5u"	N:W/O Peg	N:NON Type	RoHS	EX:06000000 A:6.0 (Maximum Dim.A=8.0mm)
		GB:10u" GC:20u" GD:30u" T0:Tin Plated	SB:10u" SC:20u" SD:30u" TE:Tin 200u"		 C:Tube With cap H:T/R W/O cap R:T/R With cap T:Tube W/O cap X:Box		

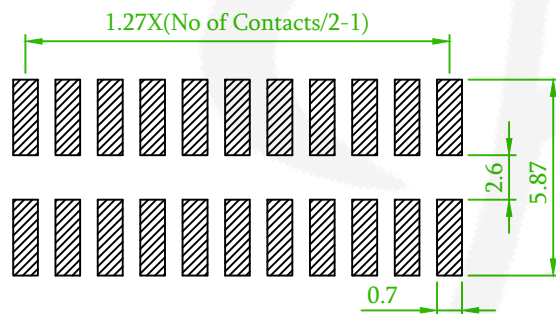


Recommended PCB Layout
(PCB TOLERANCE $\pm$ 0.05)

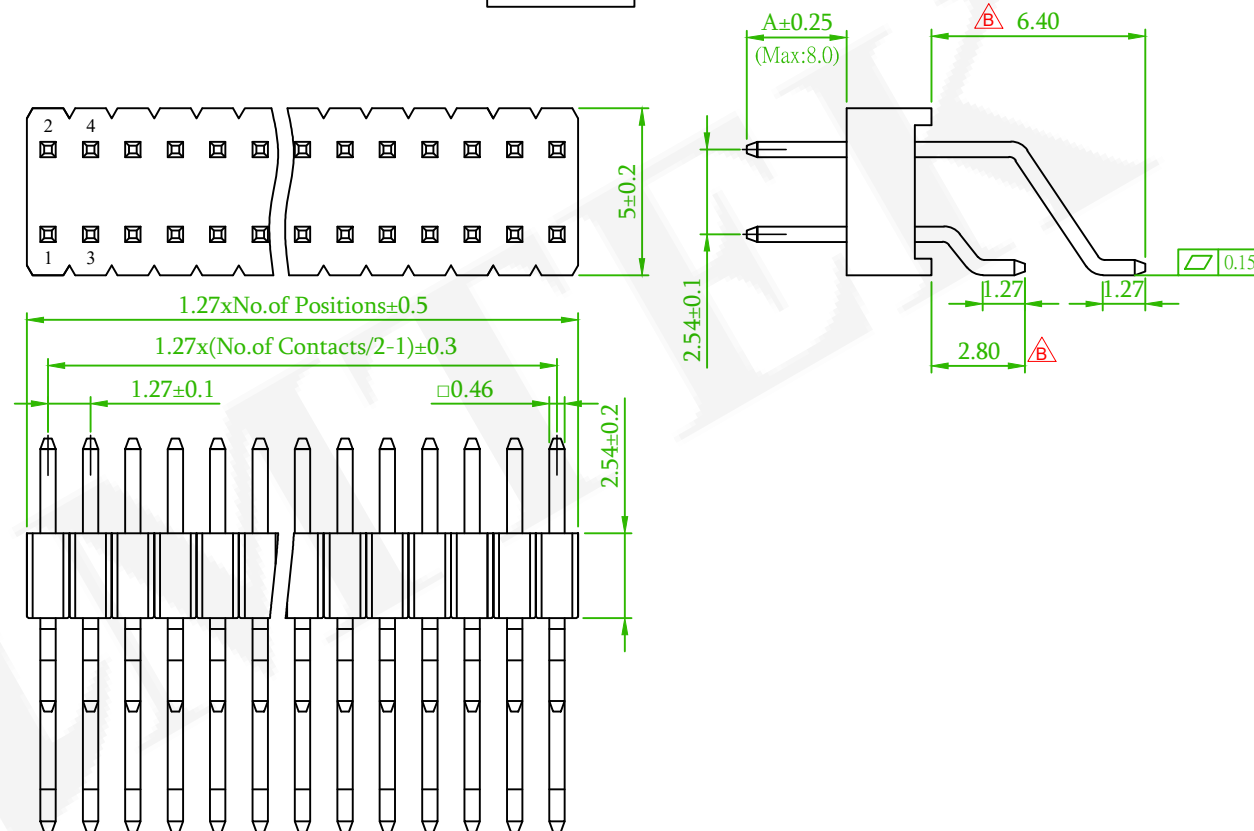

Old P/N : PH4MR25-2XX-U

	ECN NO.:231027 Revise the drawing	David	2023/11/09
	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 1.27x2.54mm				頁數 Page	1/1
品號 PART NO.	  5PH4MRA25- 2XXXXXXXU-XXX000000-00			繪圖 DRAWN	Joe 2010/02/25	
圖號 DRAWING NO.	GN003-GA011	版本 REV.	E	核對 CHECKED	Paul 2010/02/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/02/25	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		