

MATERIAL



Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass △


ORDER INFORMATION

5 P H 4 M S A 1 7 - 1 X X X X X △ X X U - A/B/C - 0 0

1:Single Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA:5u"	S0:Selective Au SA:5u"	A:A Type (Odd & Even Pin) B:B Type (Only Even Pin)	RoHS	EX:040050038 A:4.0(040) B:5.0(050) C:38.0(038)
		GB:10u"	SB:10u"	N:W/O Peg		
		GC:20u"	SC:20u"		C:Tube With cap(5 Pin ↑) H:T/R W/O cap R:T/R With cap T:Tube W/O cap(5 Pin ↑) X:Box	
		GD:30u"	SD:30u"			
		T0:Tin Plated	TE:Tin 200u"			

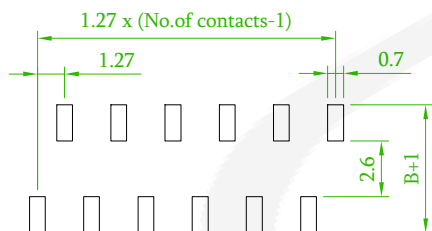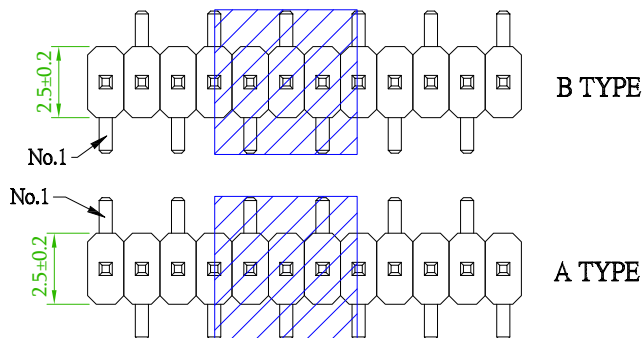


B TYPE

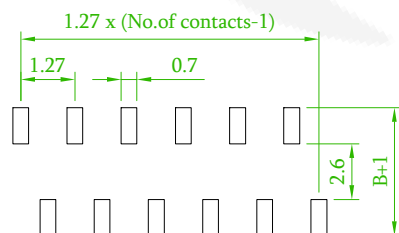


A TYPE

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

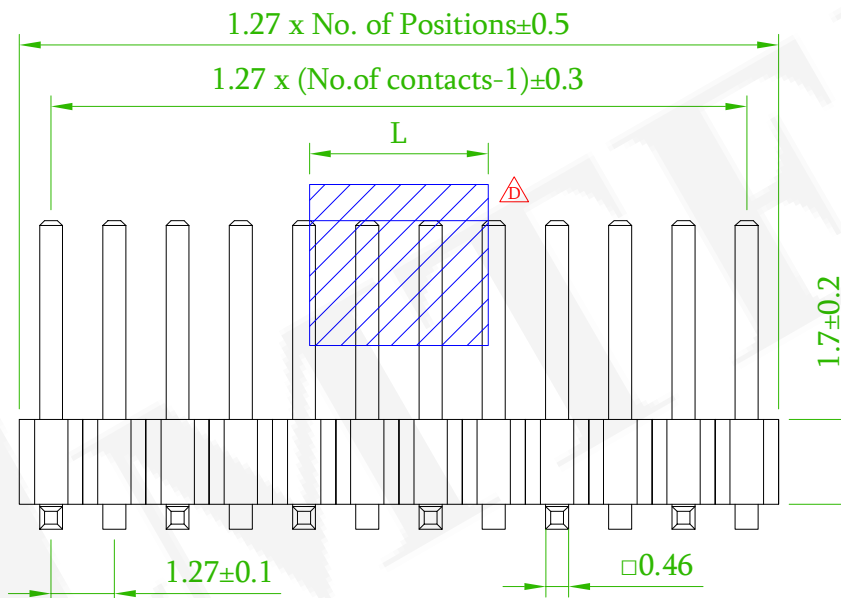

CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

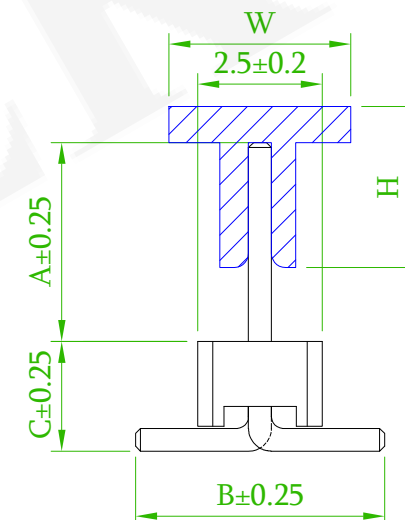

Old P/N : PH4M17-1XX-U

△	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
△ x1	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△ x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
 耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27x2.54mm				頁數 Page	1/1
品號 PART NO.	5PH4MSA17-1XXXXXXXXU-XXXXXXXXXX-00 △				繪圖 DRAWN	Jeff 2012/08/23
圖號 DRAWING NO.	GN003-GA012	版本 REV.	D	核對 CHECKED	Yvonne 2012/08/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2012/08/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		