

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH4MSA25-1XXXXNXXU-A/B/C-00

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

A:A Type
(Odd & Even Pin)

B:B Type
(Only Even Pin)

RoHS

EX:040050030
A:4.0(040)
B:5.0(050)
C:3.0(030)

C:Tube With cap(5 Pin)

H:T/R W/O cap



R:T/R With cap

T:Tube W/O cap(5 Pin)


X:Box




AMTEK 穩德
2021.10.29
Released DCC

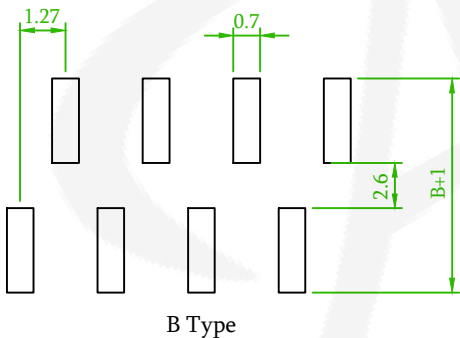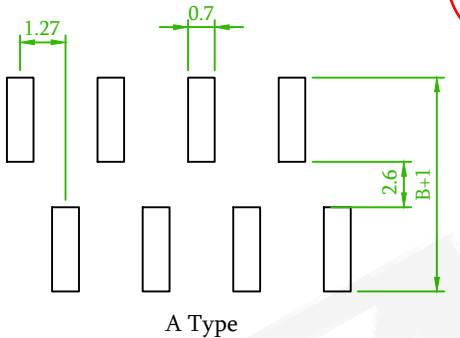



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

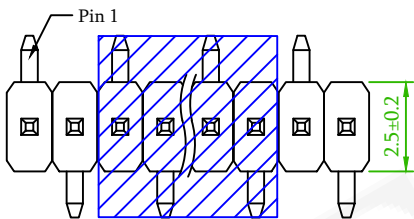

A Type

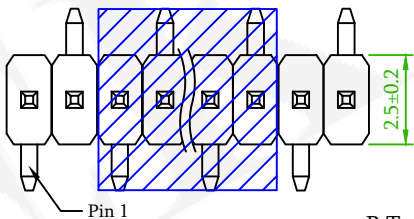

B Type

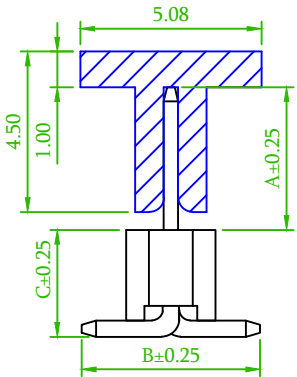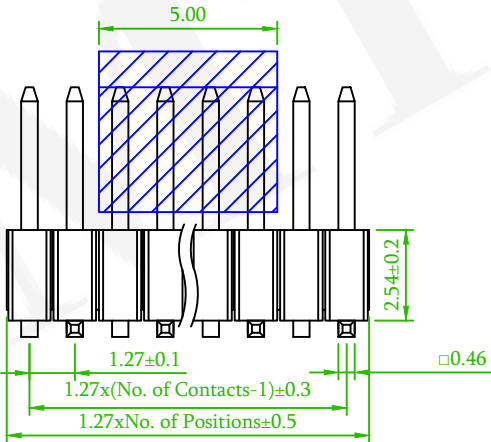

Old Part No. : PH4M25-1XX-U

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
△x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
△x2	ECN NO. : 170503. Add annotations.	Gary	2017/06/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

穩德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm x 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH4MSA25-1XXXXNXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/21
圖號 DRAWING NO.	GN016-GA364	版本 REV.	D	核對 CHECKED	John 2015/08/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		