

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass ⚠E

ORDER INFORMATION

5 P H 4 M S A 2 5 - 2 X X X X X X X U - A/B/C - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: 5u"

GB: 10u"

GC: 20u"

GD: 30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA: 5u"

SB: 10u"

SC: 20u"

SD: 30u"

N-W/O Peg
P-With Peg


N-Non Type

RoHS


EX: 040072038
A: 4.0(040)
B: 7.2(072)
C: 3.8(038)

⚠C


C: Tube With cap
H: T/R W/O cap
R: T/R With cap
T: Tube W/O cap
X: Box

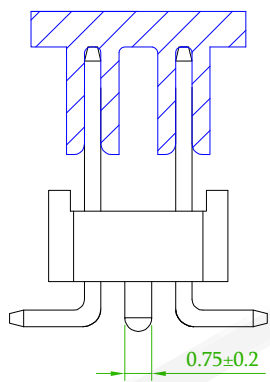



⚠D With Peg

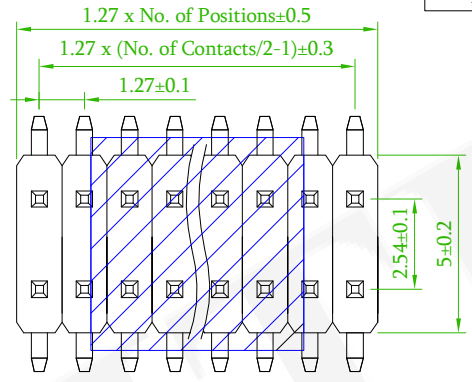

AMTEK 耀德
2023.10.25
Released DCC

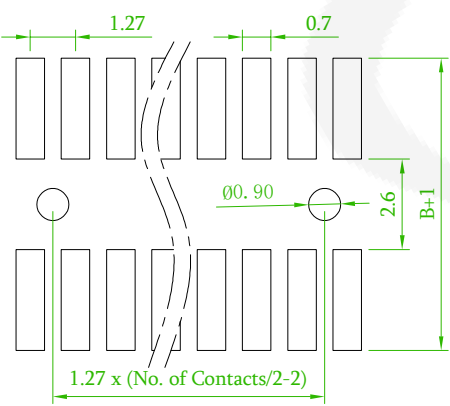

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

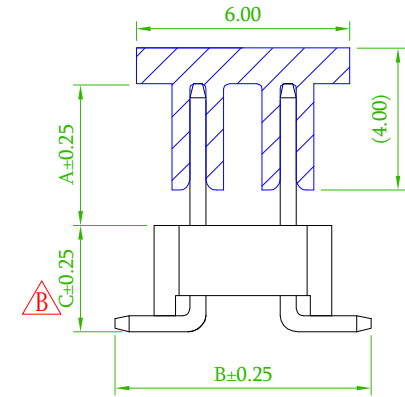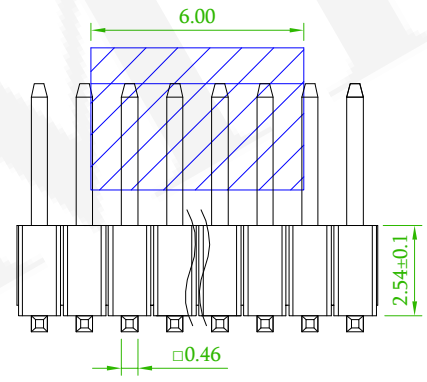

W/O Peg
Old Part No. : PH4M25-2XX-U

⚠E	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
⚠D x1	ECN:180812,Revise the Peg	Mia	2018/08/22
⚠C x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm x 2.54mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH4MSA25- 2XXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Roy 2015/08/21
圖號 DRAWING NO.	GN016-MC086	版本 REV.	E	核對 CHECKED	John 2015/08/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		