

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass



ORDER INFORMATION

5 P H 4 R D A 1 7 - 1 X X X X X X U - A/B/C - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

N:W/O Peg

N:Non Type

RoHS

EX:050025033
A:5.0(050)
B:2.5(025)
C:3.3(033)

G0:Gold Flash

S0:Selective Au

GA:5u"

SA: 5u"

GB:10u"

SB:10u"

GC:20u"

SC:20u"

GD:30u"

SD:30u"

T0:Tin Plated

TE:Tin 200u"

T:Tube W/O Cap





X:Box



AMTEK 糧德

2023.10.25

Released DCC

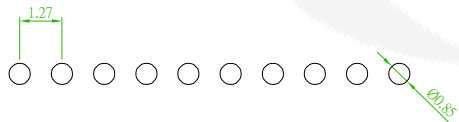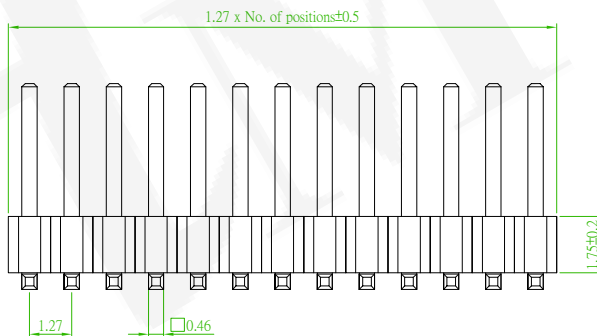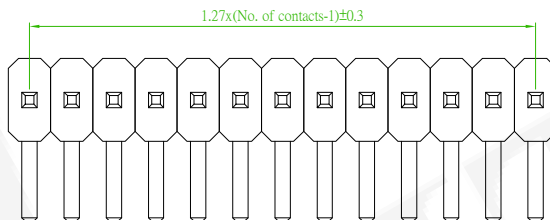

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old P/N : PH4R17-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	5PH4RDA17-1XXXXXXXU-XXXXXXX-00				繪圖 DRAWN	Kent 2006/07/14
	圖號 DRAWING NO.	GW041-GA016	版本 REV.	C	核對 CHECKED	Paul 2006/07/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/07/14	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE