

MATERIAL

Insulator: Nylon 6T, UL94V-0, Black 
Contact Pin: Brass 


ORDER INFORMATION

5 P H 4 R D A 1 7 - 2 X X X X N N X U - A/B/C - 0 0



2: Dual Row	No. of contacts Per Row(02~50)	N: W/O Peg	N: Non Type	RoHS	EX: 030040040 A: 3.0(030) B: 4.0(040) C: 4.0(040)
G0: Gold Flash		S0: Selective Au		T: Tube W/O Cap X: Box	
GA: 5u"		SA: 5u"			
GB: 10u"		SB: 10u"			
GC: 20u"		SC: 20u"			
GD: 30u"		SD: 30u"			
T0: Tin Plated		TE: Tin 200u"			



AMTEK 耀德
2021.10.29
Released DCC

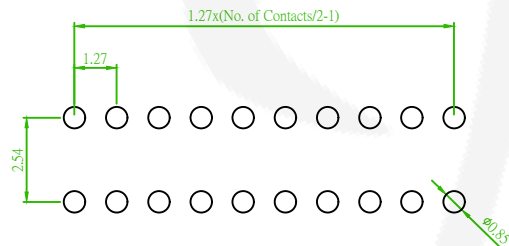

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

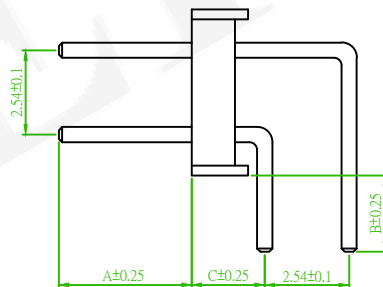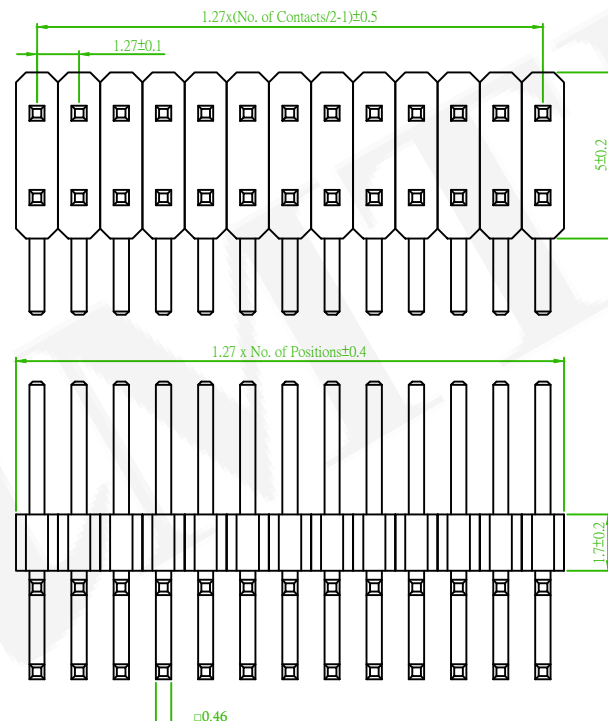

Old P/N : PH4R17-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27x2.54mm				頁數 Page	1/1
	品號 PART NO.	5PH4RDA17-2XXXXNXXU-XXXXXXX-00				繪圖 DRAWN	Kent 2004/09/10
	圖號 DRAWING NO.	GW041-GA017	版本 REV.	C	核對 CHECKED	Paul 2004/09/10	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2004/09/10	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		