

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH4RDA25-2XX-XX-XX-XX-XX-XX-U-A/B/C-00

2:Daul Row

No. of contacts
Per Row(02~50)

G0:Gold Flash
GA:5u"
GB:10u"
GC:20u"
GD30u"
T0:Tin Plated

S0:Selective Au
SA:5u"
SB:10u"
SC:20u"
SD:30u"
TE:Tin 200u"

N:W/O Peg

N:Non Type


T:Tube W/O Cap
X:Box

RoHS


EX:030030033
A:3.0(030)
B:3.0(030)
C:3.3(033)



AMTEK 耀德
2023.10.25
Released DCC

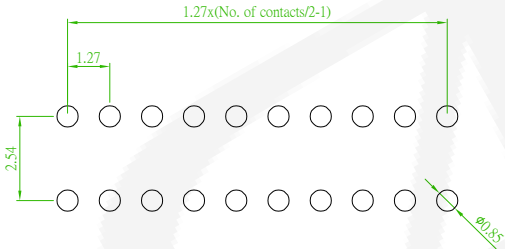

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

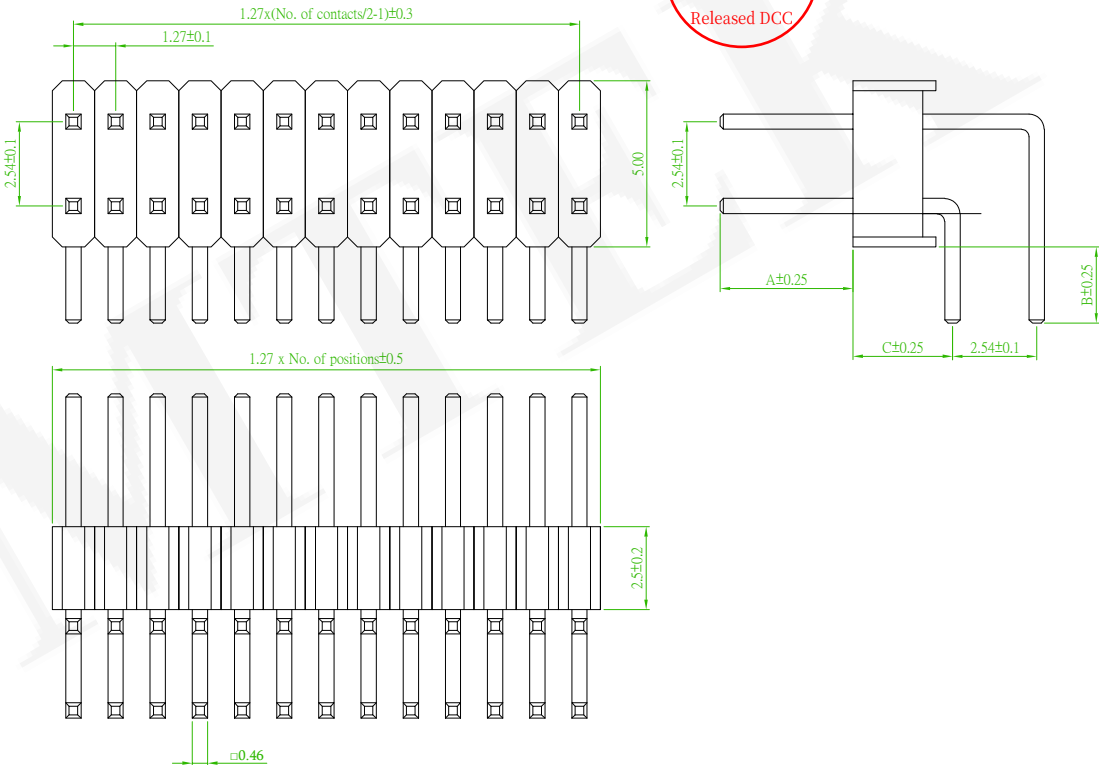

Old P/N : PH4R25-2XX-U

	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27x2.54mm				頁數 Page	1/1
	品號 PART NO.	5PH4RDA25-2XXXXXXXU-XXXXXXX-00				繪圖 DRAWN	Kent 2006/06/27
	圖號 DRAWING NO.	GW041-GA018	版本 REV.	C	核對 CHECKED	Paul 2006/06/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/06/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		