

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass **ORDER INFORMATION**

5 P H 4 S D A 1 7 - 1 X X X X X X X U - A/B/000 - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:Non Type

N:W/O Peg

RoHS

X:Box

B:Bag

T:Tube W/O cap

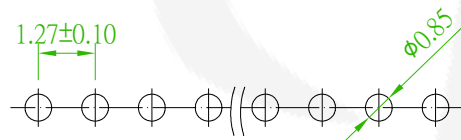
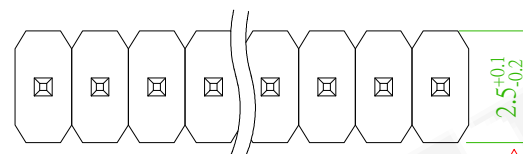

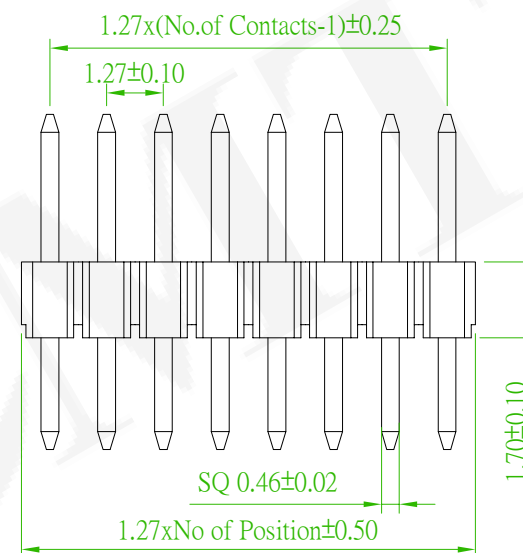
H:T/R W/O cap

EX:040024000
A:4.0(040)
B:2.4(024)

AMTEK 耀德

2023.10.25

Released DCC

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:PH4S17-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm x 2.54mm PLASTIC HEIGHT 1.7mm DIP Straight				頁數 Page	1/1
	品號 PART NO.	5PH4SDA17-  1XXXXXXXXXU-XXXXXXXX000-00				繪圖 DRAWN	Roy 2015/08/21
	圖號 DRAWING NO.	GN110-RD108	版本 REV.	C	核對 CHECKED	John 2015/08/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2015/08/21	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
	ECN NO.:201231 Revise the tolerance	Alice	2021/01/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE