
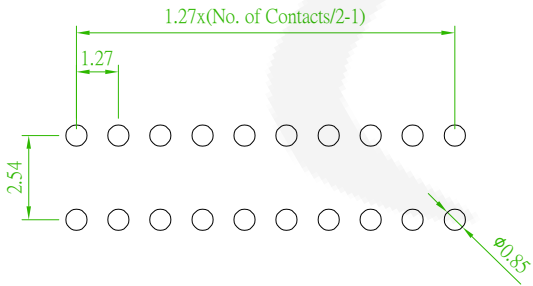




MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass
ORDER INFORMATION
5 P H 4 S D A 1 7 - 2 X X X X X X U - A/B - 0 0



Table with 2 columns: G0:Gold Flash, S0:Selective Au. Rows include GA:5u", GB:10u", GC:20u", GD:30u", T0:Tin Plated and SA:5u", SB:10u", SC:20u", SD:30u", TE:Tin 200u".

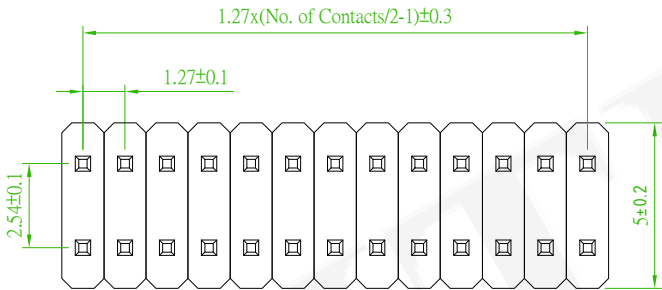

Recommended PCB Layout (PCB TOLERANCE ±0.05)

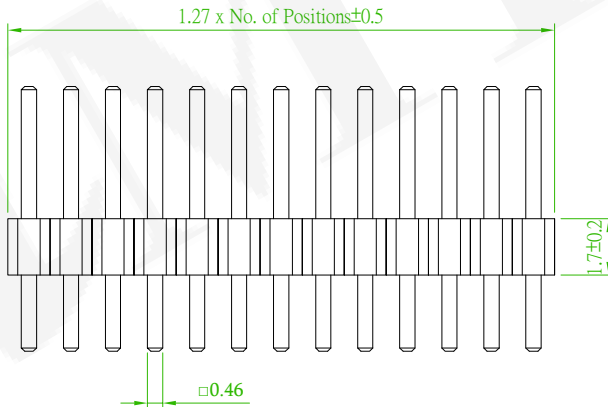

Old P/N : PH4S17-2XX-U

Table with 4 columns: Title, Part No., Drawing No., Customer P/N, Tolerance, Pin Header 1.27x2.54mm, Version, Scale, Unit, Drawing, Checked, Approved, Third Angle Projection, Page, and 1/1.

Table with 4 columns: REV., ECN NO. OR DESCRIPTION, REVISED, DATE. Includes revision history for ECN NO.:230806 and ECN:170910.