


MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 
Contact Pin: Brass 



ORDER INFORMATION

5 P H 4 S D A 2 5 - 1 X X X X N N X U - XXXXXX000 - 0 0

1:Single Row	No. of contacts Per Row(02~50)	<table><tr><td>G0:Gold Flash</td><td>S0:Selective</td></tr><tr><td>GA:5u"</td><td>SA:5u"</td></tr><tr><td>GB:10u"</td><td>SB:10u"</td></tr><tr><td>GC:20u"</td><td>SC:20u"</td></tr><tr><td>GD:30u"</td><td>SD:30u"</td></tr><tr><td colspan="2">T0:Tin Plated</td></tr><tr><td colspan="2">TE:Tin 200u"</td></tr></table>	G0:Gold Flash	S0:Selective	GA:5u"	SA:5u"	GB:10u"	SB:10u"	GC:20u"	SC:20u"	GD:30u"	SD:30u"	T0:Tin Plated		TE:Tin 200u"		N:W/O Peg	N:NON Type	RoHS	EX:070550000 A:7.0(070) B:5.5(055)
G0:Gold Flash	S0:Selective																			
GA:5u"	SA:5u"																			
GB:10u"	SB:10u"																			
GC:20u"	SC:20u"																			
GD:30u"	SD:30u"																			
T0:Tin Plated																				
TE:Tin 200u"																				
					<table><tr><td>H:T/R W/O cap</td></tr><tr><td>T:Tube W/O cap</td></tr><tr><td>X:Box</td></tr></table>	H:T/R W/O cap	T:Tube W/O cap	X:Box												
H:T/R W/O cap																				
T:Tube W/O cap																				
X:Box																				

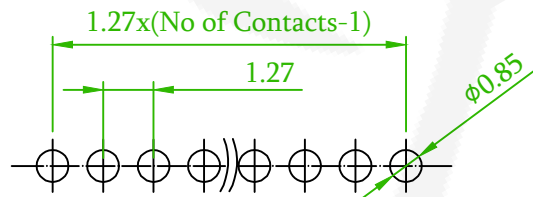

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

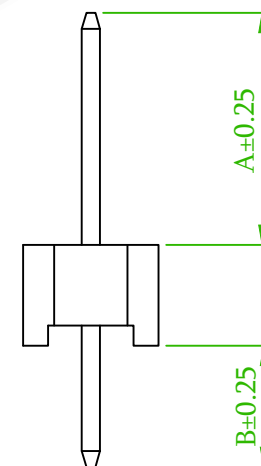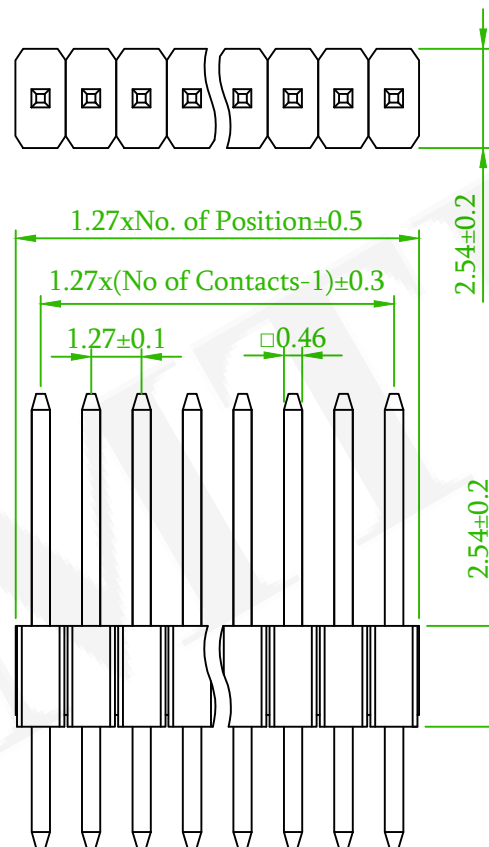

Old Part No. :PH4S25-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
	品號 PART NO.	5PH4SDA25-1XXXXNXXU-XXXXXX000-00				繪圖 DRAWN	Mia 2016/10/27
	圖號 DRAWING NO.	GN016-MC008	版本 REV.	C	核對 CHECKED	Jonny 2016/10/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
 x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE