

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 4 S D A 2 5 - 2 X X X X X X X U - A/B/000 - 0 0



2: Dual Row	No. of contacts Per Row(02~50)	GO: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated TE: Tin 200u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg	N: Non Type	RoHS	EX: 040024000 A: 4.0(040) B: 2.4(024)
						H: T/R W/O cap T: Tube W/O cap X: Box	



AMTEK 耀德
2023.10.25
Released DCC

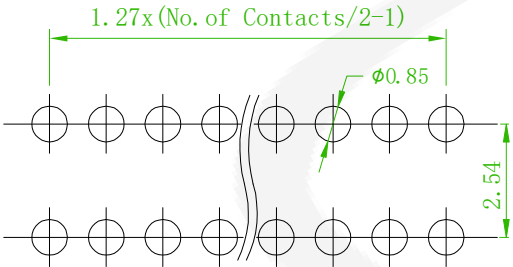

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

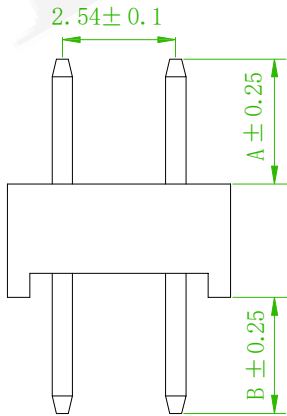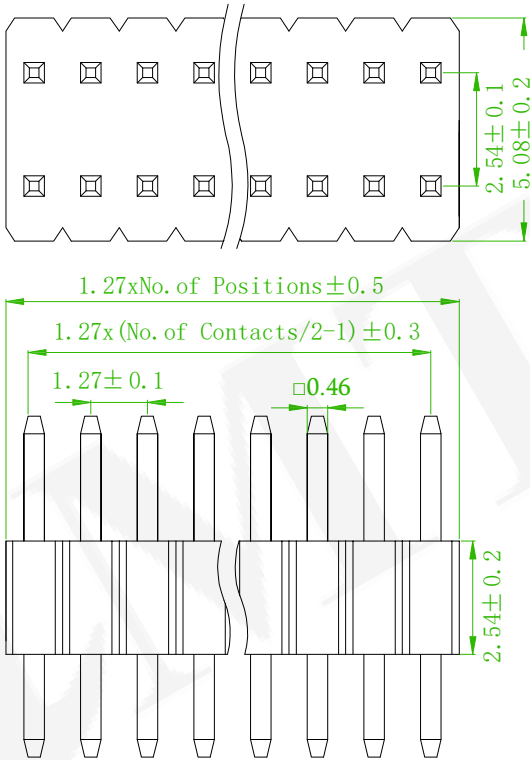

Old Part No. : PH4S25-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN NO.:230806 Revise the drawing	Randy	2023/09/21
△B x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm x 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH4SDA25-2XXXXXXXU-XXXXXX000-00				繪圖 DRAWN	Roy 2015/08/21
圖號 DRAWING NO.	GN016-GA366	版本 REV.	C	核對 CHECKED	John 2015/08/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/21	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		