

MATERIAL  Insulator: Nylon9T, UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5

P

H

5

D

D

A

1

0

-

1

X

X

X

X

X

X

X

U

-

A/L1/B

-

0

0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T: Tin Plated
TE: Tin 200u"

S:Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"

N:Non Type
N:W/O Peg


X:Box
R:T/R With Cap
C:Tube With Cap

B:Bag
H:T/R W/O Cap
T:Tube W/O Cap



EX:095020060
A:9.50(095)
L1:2.00(020)
B:6.00(060)



AMTEK 耀德
2023.10.02
Released DCC

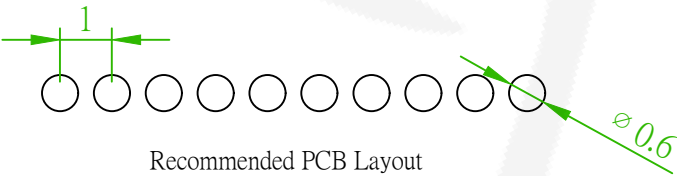

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

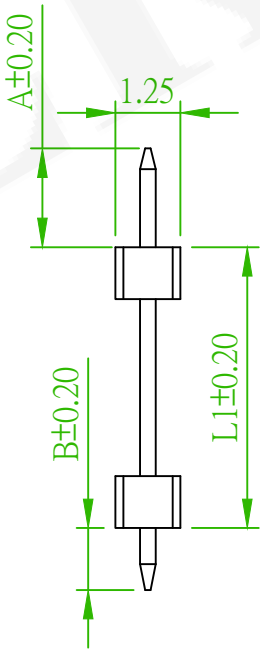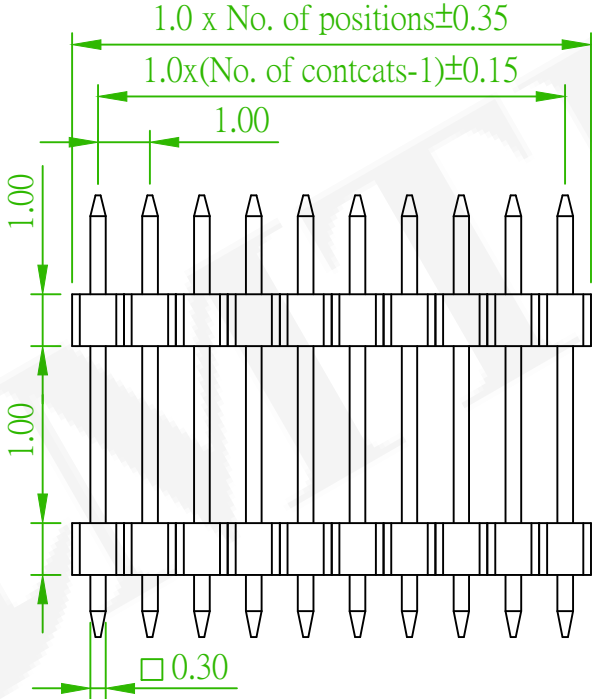

Old P/N : PH5D10-1XX-U

	ECN NO.:230805 Revise the drawing	Alice	2023/08/28
	ECN No.:210619 Cancel the top view	Alice	2021/09/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
品號 PART NO.	5PH5DDA10-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Kent 2006/11/09
圖號 DRAWING NO.	GN016-GA005	版本 REV.	C	核對 CHECKED	Paul 2006/11/09	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/11/09	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		