

SPECIFICATIONS

Current Rating: 0.75 AMP

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Dielectric Voltage: 500V AC for one minute

Operation temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp.Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 5 D D A 1 0 - 2 X X X X

◎:Standard Recommend

2: Dual Row

No. of contacts
Per Row(02~50)

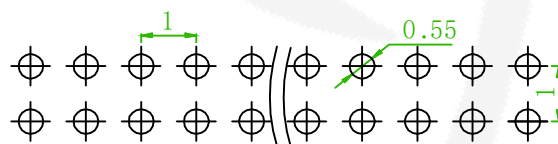
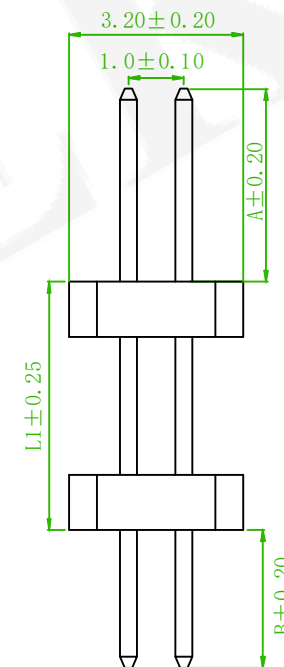
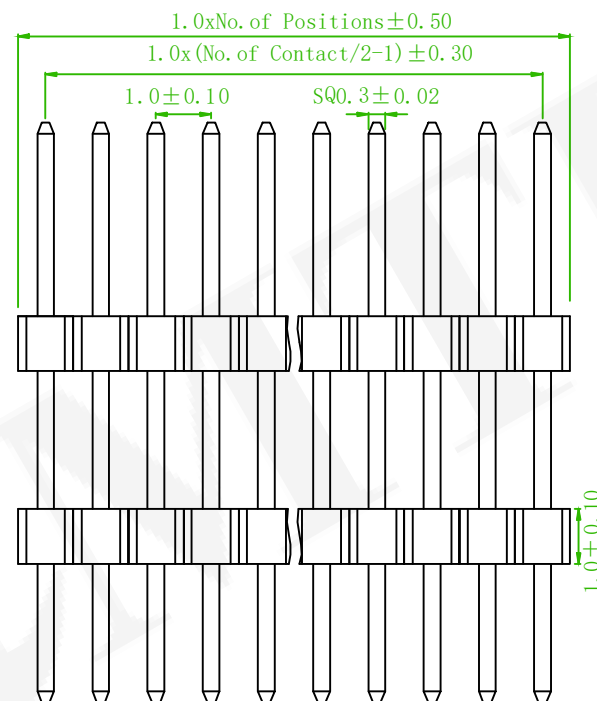
G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:Non Type

RoHS

◎X:Box	B:Bag
R:T/R With Cap	H:T/R W/O Cap
C:Tube With Cap	T:Tube W/O Cap

EX:030020040
A:3.0(030)
L1:2.0(020)
B:4.0(040)
 AMTEK 耀德
 2021.10.06
 Released DCC

 Recommended PCB Layout
 (PCB TOLERANCE ±0.1)


Old Part No. : PH5D10-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
	品號 PART NO.	5PH5DDA10-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/08
	圖號 DRAWING NO.	GN016-GA343	版本 REV.	B	核對 CHECKED	Johnny 2016/09/08	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/08	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN No.:210619 Cancel the top view	Alice	2021/09/16
	ECN NO. OR DESCRIPTION	REVISED	DATE