

MATERIAL

Insulator: Nylon9T, UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 5 D M A 1 0 - 2 X X X X X X X U - A/L1/B - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash
GA: 5u"
GB: 10u"
GC: 20u"
GD: 30u"

S0: Selective
SA: 5u"
SB: 10u"
SC: 20u"
SD: 30u"

T0: Tin Plated
TE: Tin 200u"

N: W/O Peg

N: Non Type


RoHS

X: Box
B: Bag
T: Tube, W/O Cap
C: Tube, With Cap
F: Tube, with Mylar
H: Tape & Reel, W/O Cap
R: Tape & Reel, With Cap
M: T/R with Mylar



EX: 060060030
A: 6.0(060)
L1: 6.0(060)
B: 3.0(030)



AMTEK 耀德
2023.10.02
Released DCC

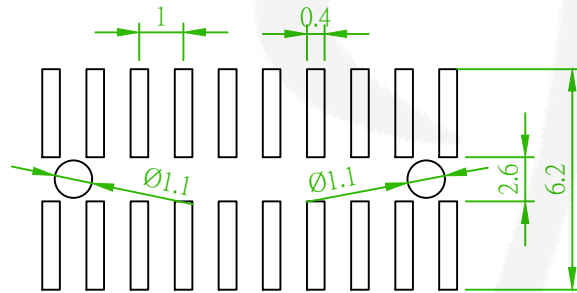

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

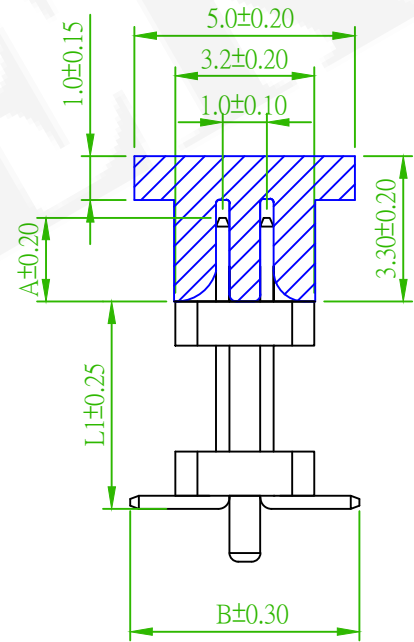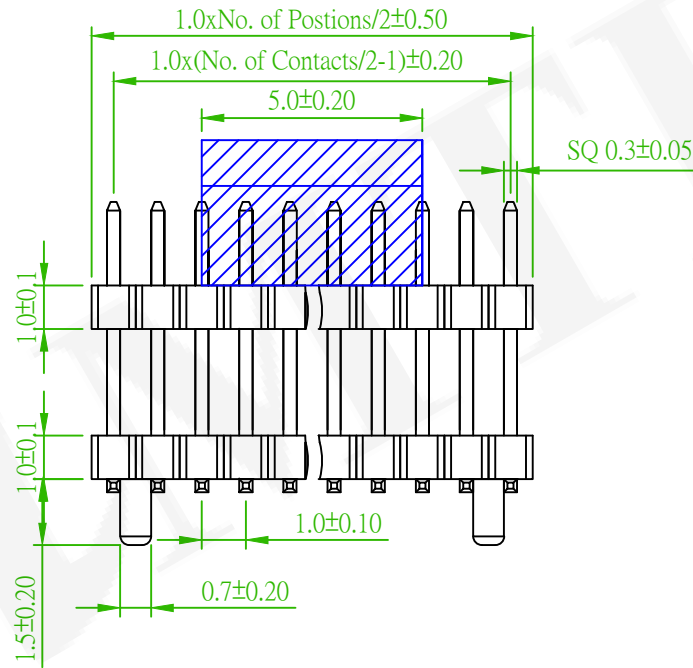

Old Part No. : PH5DM10-2XX-U

Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
品號 PART NO.	5PH5DMA10-2XXXXXXXU -XXXXXXXX-00				繪圖 DRAWN	Erin 2015/08/17
圖號 DRAWING NO.	GN016-GA344	版本 REV.	C	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230805 Revise the drawing	Alice	2023/08/28
	ECN No.:210619 Cancel the top view	Alice	2021/9/22