

MATERIAL


Insulator: Nylon9T, UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION



5	P	H	5	D	M	A	1	5	-	2	X	X	X	X	X	X	X	U	-	A/L1/B	-	0	0
2: Dual Row				No. of contacts Per Row(02~25)				G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u"		S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"		N: W/O Peg P: With Peg		N: Non Type		U: RoHS +Hi-Temp.		EX: 030060040 A: 3.0(030) L1: 6.0(060) B: 4.0(040)					
										T0: Tin Plated TE: Tin 200u"		R: T/R With Cap C: Tube With Cap		H: T/R W/O Cap T: Tube W/O Cap									



AMTEK 糧德
2023.10.02
Released DCC

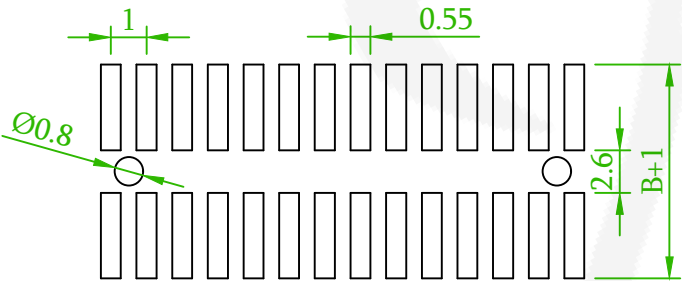

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

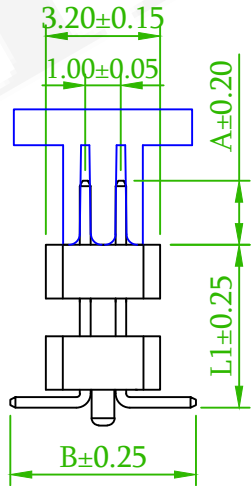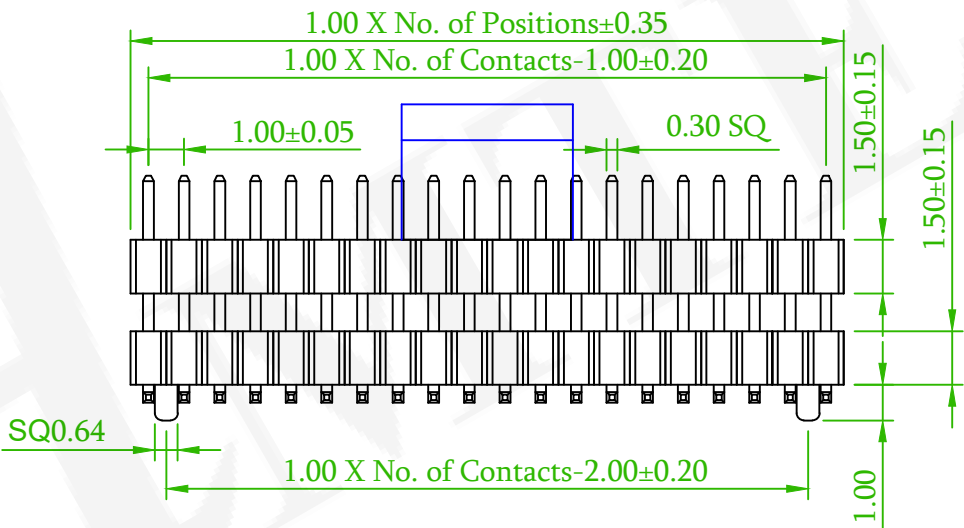

Old Part No. : PH5DM15-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:230805 Revise the drawing	Alice	2023/08/28
	ECN No.:210619 Cancel the top view	Alice	2021/9/22



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
品號 PART NO.	5PH5DMA15-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/10/19
圖號 DRAWING NO.	GN003-GA384	版本 REV.	C	核對 CHECKED	Jonny 2016/10/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/19	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		