

MATERIAL 
Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH5MRA37-1XX-XX

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

P:With Peg

N:Non Type

RoHS

X:Box

H:T/R W/O Cap

A:Tray W/O Cap

EX:06000000

A:6.0

(Maximum
Dim.A=8.5mm)

XX

XX

XX

U

-

A


000

000


-

0


0

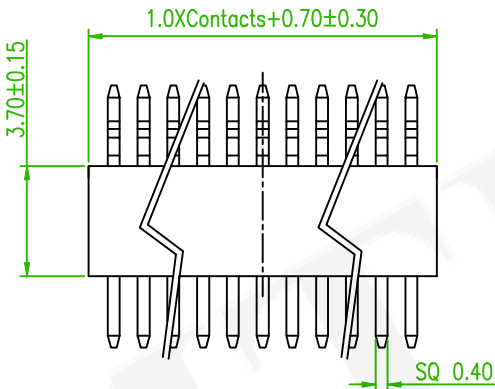



AMTEK 耀德
2023.11.17
Released DCC



PIN	M
≤15	0.12
>15	0.15

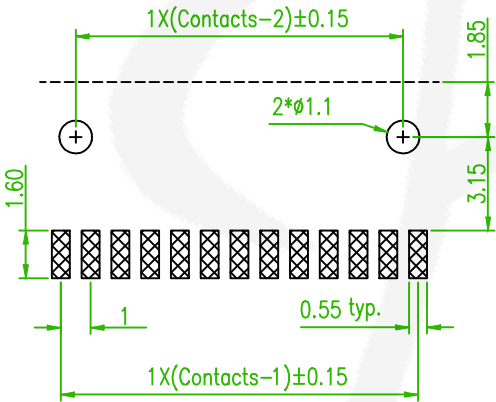

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

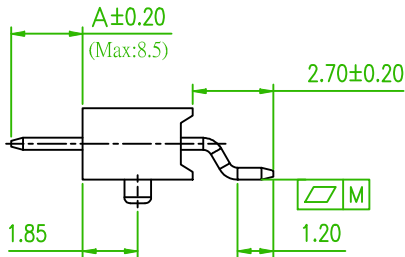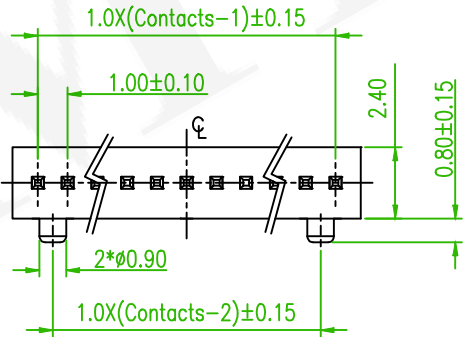

With Post

Old Part No. : PH5MR37-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x2	ECN NO.:231027 Revise the drawing	David	2023/11/09
 x1	ECN NO.:230805 Revise the drawing	Alice	2023/08/25



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
品號 PART NO.	5PH5MRA37-1XXXXXXU -XXX000000-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN003-GA361	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		