

MATERIAL ⚠

Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 5 R D A 1 0 - 1 X X X X X X X U - A/B/C - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:Tin Plated
TE:Tin 200u"

S0:Selective
SA:5u"
SB:10u"
SC:20u"
SD:30u"



N:W/O Peg

N:Non Type

RoHS

X:Box
B:Bag
T:Tube, W/O Cap
C:Tube, With Cap
H :Tape & Reel, W/O Cap
R:Tape & Reel,With Cap

EX:060067030
A:6.0(060)
B:6.86(067)
C:3.0(030)

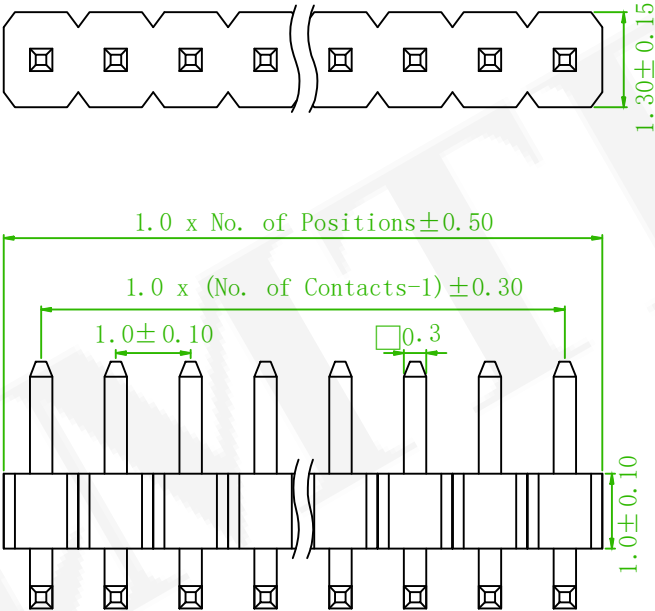

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH5R10-1XX-U

⚠x1	ECN NO.:230805 Revise the drawing	Alice	2023/08/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
	品號 PART NO.	5PH5RDA10-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Erin 2015/08/17
	圖號 DRAWING NO.	GN016-GA359	版本 REV.	B	核對 CHECKED	John 2015/08/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		