





Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

5 P H 5 R D A 1 5 - 2 X X X X X X X U - A/B/C - 0 0



```

graph TD
    Root[ ] --- N1[ ]
    Root --- N2[ ]
    Root --- N3[ ]
    Root --- N4[ ]
    Root --- N5[ ]
    Root --- N6[ ]
    N1 --- N1_1[2: Dual Row]
    N1 --- N1_2[No. of contacts Per Row(02~40)]
    N2 --- N2_1[ ]
    N2 --- N2_2[ ]
    N2_1 --- N2_1_1[ ]
    N2_1 --- N2_1_2[ ]
    N2_1_1 --- N2_1_1_1[G0:Gold Flash]
    N2_1_1 --- N2_1_1_2[S0:Selective Au]
    N2_1_1_1 --- N2_1_1_1_1[GA: Au 5u"]
    N2_1_1_1 --- N2_1_1_1_2[SA:Selective Au 5u"]
    N2_1_1_2 --- N2_1_1_2_1[GB: Au 10u"]
    N2_1_1_2 --- N2_1_1_2_2[SB:Selective Au 10u"]
    N2_1_2 --- N2_1_2_1[GC: Au 20u"]
    N2_1_2 --- N2_1_2_2[SC:Selective Au 20u"]
    N2_2 --- N2_2_1[GD: Au 30u"]
    N2_2 --- N2_2_2[SD:Selective Au 30u"]
    N3 --- N3_1[T: Tin Plated]
    N3 --- N3_2[TE: Tin 200u"]
    N4 --- N4_1[X: Box]
    N4 --- N4_2[R: T/R with cap]
    N4 --- N4_3[C: Tube with cap]
    N5 --- N5_1[B: Bag]
    N5 --- N5_2[H: T/R W/O cap]
    N5 --- N5_3[T: Tube W/O cap]
    N6 --- N6_1[EX:018018025]
    N6_1 --- N6_1_1[A:1.80(018)]
    N6_1 --- N6_1_2[B:1.80(018)]
    N6_1 --- N6_1_3[C:2.50(025)]
  
```

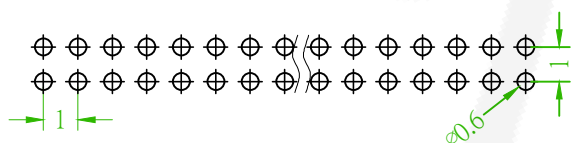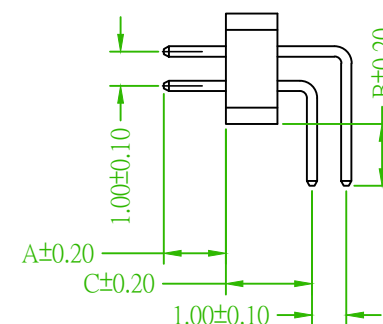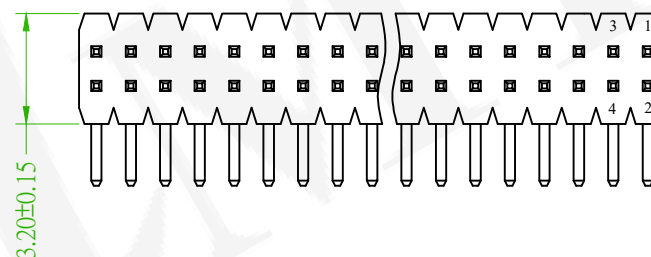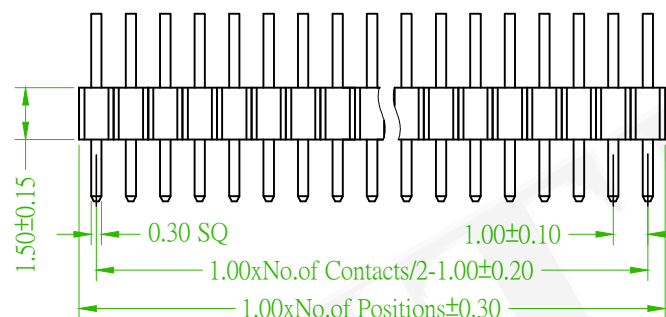

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old P/N : PH5R15-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.0mm				頁數 Page	1/1
	品號 PART NO.	5PH5RDA15-2XXXXXXXU -XXXXXXXXX-00			繪圖 DRAWN	Joe 2009/10/07	
	圖號 DRAWING NO.	GN003-GA004	版本 REV.	B	核對 CHECKED	Sinnys 2009/10/07	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/10/07	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		