

MATERIAL

Insulator: Nylon 9T,UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 5 S D A 1 0 - 1 X X X X N N X U - A/B/000 - 0 0

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

RoHS

X: Box
B: Bag
T: Tube W/O Cap




EX: 033020000
A: 3.3
B: 2.0



AMTEK 耀德

2023.10.02

Released DCC

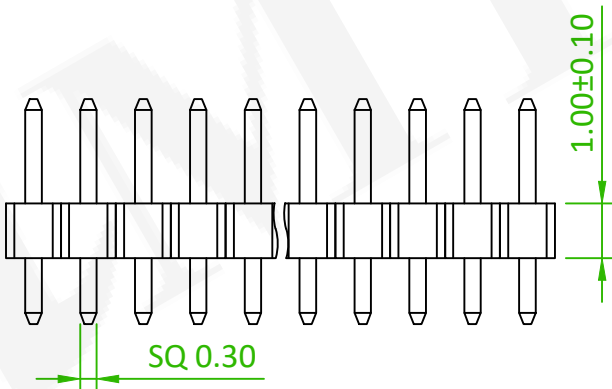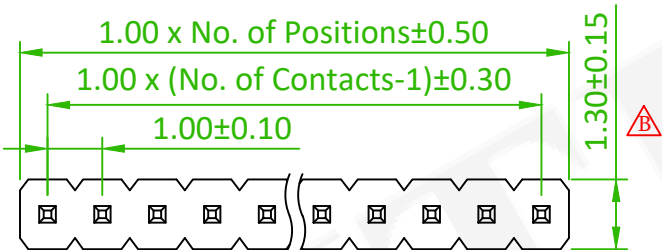

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH5S10-1XX-U

	ECN NO.:230805 Revise the drawing	Alice	2023/08/25
	Modify dimension, order information, specification	B	2017/03/22 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 1.0mm			頁數 Page	1/1
	品號 PART NO.	5PH5SDA10-1XXXXXXXU -XXXXXX000-00			繪圖 DRAWN	Erin 2015/08/17
	圖號 DRAWING NO.	GN016-GA324	版本 REV.	C	核對 CHECKED	John 2015/08/17
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	